



**QUEEN'S
UNIVERSITY
BELFAST**

Beyond carbon and energy: The challenge in setting guidelines for life cycle assessment of biofuel systems

Czyrnek-Delêtre, M. M., Smyth, B. M., & Murphy, J. D. (2017). Beyond carbon and energy: The challenge in setting guidelines for life cycle assessment of biofuel systems. *Renewable Energy*, 105, 436-448. <https://doi.org/10.1016/j.renene.2016.11.043>

Published in:
Renewable Energy

Document Version:
Peer reviewed version

Queen's University Belfast - Research Portal:
[Link to publication record in Queen's University Belfast Research Portal](#)

Publisher rights

© 2016 Elsevier Ltd. All rights reserved. This manuscript version is made available under the CC-BY-NC-ND 4.0 license <http://creativecommons.org/licenses/by-nc-nd/4.0/>, which permits distribution and reproduction for non-commercial purposes, provided the author and source are cited.

General rights

Copyright for the publications made accessible via the Queen's University Belfast Research Portal is retained by the author(s) and / or other copyright owners and it is a condition of accessing these publications that users recognise and abide by the legal requirements associated with these rights.

Take down policy

The Research Portal is Queen's institutional repository that provides access to Queen's research output. Every effort has been made to ensure that content in the Research Portal does not infringe any person's rights, or applicable UK laws. If you discover content in the Research Portal that you believe breaches copyright or violates any law, please contact openaccess@qub.ac.uk.


Open Access

This research has been made openly available by Queen's academics and its Open Research team. We would love to hear how access to this research benefits you. – Share your feedback with us: <http://go.qub.ac.uk/oa-feedback>

Accepted Manuscript

Beyond carbon and energy the challenge in setting guidelines for life cycle assessment of biofuel systems

Magdalena Czyrnek-Delêtre, Beatrice M. Smyth, Jerry D. Murphy



PII: S0960-1481(16)31012-6
DOI: [10.1016/j.renene.2016.11.043](https://doi.org/10.1016/j.renene.2016.11.043)
Reference: RENE 8317
To appear in: *Renewable Energy*
Received Date: 08 January 2016
Revised Date: 25 October 2016
Accepted Date: 17 November 2016

Please cite this article as: Magdalena Czyrnek-Delêtre, Beatrice M. Smyth, Jerry D. Murphy, Beyond carbon and energy the challenge in setting guidelines for life cycle assessment of biofuel systems, *Renewable Energy* (2016), doi: 10.1016/j.renene.2016.11.043

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

Highlights:

1. More than one functional unit should be used whenever possible
2. System boundaries should be expanded to include co- and by-products.
3. Climate, acidification, eutrophication, land use, and energy are the key indicators
4. Existing frameworks for biofuels LCA focus on greenhouse gases emissions

Beyond carbon and energy: the challenge in setting guidelines for life cycle assessment of biofuel systems

Magdalena Czyrnek-Del tre^{1,2}, Beatrice M. Smyth³, Jerry D. Murphy^{1,2,*}

1. MaREI centre, Environmental Research Institute, University College Cork (UCC), Ireland,

2. School of Engineering, UCC, Ireland,

3. School of Mechanical and Aerospace Engineering, Queen's University, Belfast UK

Abstract:

Life cycle assessment (LCA) is a most suitable tool for a uniform assessment methodology of sustainability of biofuel systems. However, there are no binding guidelines for LCA of biofuel systems. Published LCAs use a range of methodologies, different system boundaries, impact categories and functional units, various allocation approaches, and assumptions regarding by- and co-products, as well as different reference systems to which the biofuel system is compared. The European Renewable Energy Directive and the US Renewable Fuel Standard focus on greenhouse gas (GHG) emissions. However, previous LCAs of biofuel systems have shown that a reduction of GHG emissions does not lead automatically to a decrease in other environmental impacts, and might in fact be associated with an increase in impacts such as acidification, eutrophication, and land use change. In order to enable effective comparison of biofuel systems, the authors propose a framework for biofuel LCA. System boundaries should be expanded to include the life cycle of by- and co-products. Results should be reported using more than one functional unit. Burden shifting can be avoided by considering an array of impact categories including global warming potential and energy balance, along with eutrophication and acidification potential, and a land use indicator.

Keywords: life cycle assessment; sustainability guidelines; system boundaries, impact categories, biofuels.

* Corresponding author: jerry.murphy@ucc.ie; tel +353 21 4902286

1. Introduction

1.1 Background

Total world energy consumption is predicted to increase by 56% between 2010 and 2040 [1]. The EU has set an overall mandatory target of 20% share of renewable energy in gross domestic consumption, and a target of 10% share of renewables in transport (RES-T), by 2020 [2]. The US Energy Independence and Security Act of 2007 requires 18% of transport fuel consumption to come from renewables by 2022 [3]. The use of biofuels, biogas or bioliquids as a sustainable and efficient energy source has been explored for decades [4,5]. For some time, especially in the context of peak oil, biofuels were considered a reliable renewable energy source, but their overall sustainability has been questioned in recent years [6], leading to increased focus on methods for its evaluation. Life cycle assessment (LCA) is one of the most promising approaches for evaluating the sustainability of biofuels [7] and for comparing biofuel systems. LCA is a multistage approach, which covers the full life cycle of a product. While LCA is an important tool for understanding biofuel systems, and supporting decision making, LCA procedures could be considerably strengthened in a number of key areas [8]. These include: i) methodology with goal and scope definition, ii) data collection based on real-life rather than lab scale facilities, and iii) multi-criteriality of LCA that considers all environmental impacts equally. These challenges are described in more detail below.

Goal and scope of the study, like functional unit, are often not clearly defined; sensitivity analyses are rarely performed [9]. Thomassen et al. stated that there is a lack of a generic framework for sustainability assessment of algal biofuels [10]. LCA studies of the same biofuel by different authors can give significantly different results, which can lead to the introduction of contradictory policies [11]. Such discrepancies are largely due to different methodological approaches and, although the need for a standardised methodology has been identified, there are as yet no guidelines for achieving this [8,10–13]. Moreover, many LCA studies do not specify the methodological choices made, which makes it almost impossible to replicate the study [14]. LCA addresses the life cycle of produced and consumed product [15], and is largely used by industry to assess a real-life product system. Advanced biofuels are not yet deployed on a large scale and industry data might not be available. Therefore, often LCA is based on laboratory data which makes the results much less accurate [10,16].

A further weakness is that most existing LCA studies have focused only on energy and/or greenhouse gas (GHG) emissions. Reinhardt pointed out that majority of studies called LCA are in fact only GHG emissions and energy balances [9]. Lazarevic and Martin analysing LCA and sustainability studies in Sweden found that GHG emissions dominate other environmental impacts [17]. Ridley et al. assessed more than 1600 peer-reviewed papers on biofuels and found that the most discussed topics are production technologies, GHG emissions and agricultural production of substrates, whereas the impact of biofuels on biodiversity and human health was much less investigated [18]. This is in line with Raman et al. who argue that impact on human health and resources are understudied, when it

comes to biofuel sustainability assessment [16]. Also, water, land use and land use change are seldom found in the literature [14]. GHG emissions and Global Warming Potential (GWP) are very important for LCA studies [2]. However, there are concerns that, although the use of biofuels may decrease GHG emissions, other detrimental environmental impacts, such as acidification, human toxicity, or land use change, may increase and should therefore also be taken into account in the LCA [17,19,20]. However, the inclusion of additional environmental impacts is hindered by the fact that some of the key parameters, such as indirect land use change or water use, are currently not well understood or lacking a transparent and mature calculation methodology [11,13,17,19].

1.2 Aims and Objectives

Previous papers stressed a lack of guidelines for LCA of biofuels, and a need to propose a common framework [8–10,12,13,19]. With the overall goal of bridging this gap and assisting policy makers to make informed decisions based on solid scientific evidence, the aim of this paper is to investigate and make recommendations for improving the robustness and accuracy of biofuel LCA framework. The objectives of this paper are to:

- Discuss the existing frameworks providing guideline for LCA of biofuels
- Compare various approaches used in biofuel system LCA in terms of functional unit, system boundaries, reference scenario, allocation methodology and impact categories;
- Discuss how extensive the evaluations should be in order to produce sound results;
- Make recommendations for improving the robustness of the biofuel LCA framework.

2. Methodology – construction of literature source database

A literature search was conducted in Science Direct, Research Gate and Google Scholar, using both “biofuel” and “LCA” as keywords. This includes: life cycle assessment, analysis and approach. Initially, 54 papers were selected, these were published between 2006 and 2014 (Fig. 1). Out of this initial trawl, 16 papers were retained as these papers met the criteria under investigation in this paper. Papers were excluded based on repetitiveness (in terms of system boundaries and subject of studies), and scope and aim of the studies (e.g. studies focusing on infrastructure such as LCA of anaerobic digester; LCAs of biofuels different that biodiesel, bioethanol and biomethane; LCAs with an incomplete scope, missing one of the following: functional unit, scope, impact categories, allocation). Similarly, reviews, methodological papers and cost analyses were excluded. Thus the initial 54 papers were reduced to 16 papers for detailed investigation. These 16 papers were selected in such a way that three biofuel systems (biodiesel, bioethanol and biomethane) are represented, and also under a condition that each discussed at least four of the five headings in Table 1, namely: functional unit, system boundaries, reference system, allocation, and impact categories. Biogas was included as an energy vector that is very close to biomethane. A diverse range of substrates were selected from crops

(rapeseed, palm oil, maize and grass), and from residues (tallow, used cooking oil, food waste, manures and straw). Third generation substrates were also selected (micro and macroalgae). Additionally, to validate the focus of biofuel LCAs on GHG emissions a simple calculation was carried to evaluate the percentage of peer-reviewed LCAs according to impact categories assessed. These were classified into six groups: GHG or GWP, energy, both GHG and energy, other environmental impacts, land use and water. 39 papers were considered, which were published after 2008. These were screened for impact categories assessed (Fig. 5).

3. LCA of biofuels- results

3.1 Existing LCA frameworks

LCA norms ISO (International Standard Organization) 14040 and 14044 set a general framework for LCA of any goods or services [15,21]. Functional unit should reflect the function of the products; system boundaries and impact categories should stay consistent with the goal of the study; choices should be clearly stated and explained; in terms of allocation, ISO 14044 allows for any of the allocation methodologies, provided that the choice is explained and fits into the scope of study; however it is recommended to avoid allocation whenever possible by 1) dividing processes into sub-processes and collecting data related to sub-processes; or 2) by expanding the system (substitution) [15]. PAS (Publicly Available Specification for assessment of life cycle GHG of goods and services) follows ISO 14044 in terms of general guidelines, but concentrates only on GHG emissions [22]. The UNFCCC (United Nations Framework Convention on Climate Change) through its MethPanel discusses only the issue of allocation and agrees partially with ISO, postulating that all allocation procedures can be justified [3]. However, the International Energy Agency (IEA) in its BIOMITRE manual (BIOMass-based Climate Change MITigation through Renewable Energy) states that substitution may increase the complexity of the study, and therefore advocates in favour of allocation by market value or physical relationship, such as mass volume or calorific value [23]. BIOMITRE also gives more detailed recommendations suggesting that the FU should be mass or volume or energy content. It gives guidelines and examples for biofuels' system boundaries. The tool focusses only on carbon emissions as an indicator. This is in line with the EU European Renewable Energy Directive (RED), which limits the allocation possibilities to allocation by energy content (lower heating value) and sets a MJ of fuel as the FU [2]. RED is applied in the BioGrace Excel tool [24]. BioGrace is a harmonised tool that can be used in a European context for life cycle GHG calculation of biofuels. The system boundaries are pre-set but there is a possibility to create new entries. The calculation includes also direct land use change emissions.

3.2 Functional unit

At the early stage of any LCA, the functional unit (FU) of product must be defined. The FU is a quantified description of the product system performance [15,25]. For biofuel, the product function might be the provision of fuel for transportation, or the processing of particular feedstock. Cherubini and Strømman [13] distinguished input- and output functional units. The FU can be expressed per mass of input substrate, such as one tonne of dry seaweed [26]. However, a majority of studies used an output-related FU, typically expressed in MJ of energy generated from a given feedstock [27,28], or in kilogram of produced fuel [29]. The EU RED recommends a FU of a MJ of fuel [2]. As the primary function of biofuel is to provide vehicle fuel, a commonly used FU is kilometres driven by a car or a truck transporting a given mass of freight [30,31]. For land-based biofuels, the most relevant FU was identified as land area under a crop [13].

The impact of FU was investigated by Lettens et al. [32]. Low-input energy crops were compared with traditional energy crops and it was found that if land surface was used as FU, conventional crops performed better in terms of GHG emissions, while if GJ of energy from crops was used as FU, then low-input crops performed better. Thamsiriroj and Murphy [33] [34] also explored the impact of choosing different FU, and came to contradictory conclusions when using GHG emissions per GJ or per ha as FU (Fig. 2). To better understand the findings of a LCA, Cherubini and Strømman [13] recommended using more than one FU. However LCA studies that present results using several FU are seldom found, and there is a lack of guidance on the appropriate selection of multiple FUs.

3.3 System boundaries and reference system

The boundaries of the system must be defined together with the goal and scope of the LCA. Processes and flows should be listed to consider which should be included in a LCA. Usually, there is more than one product delivered to the market from the same system. In such a case, the system boundaries might be expanded to include the life cycle of co-products, by-products, and residues [35]. Early LCAs of bioenergy systems did not include the life cycle of co- or by-products, thus giving a poor impression of biofuel systems environmental performance [31].

Some of the reviewed studies considered more than one system boundary [33,36–38]. However, only three take into account the use of biofuel in a vehicle, a boundary expansion, which can have a considerable impact on the results. Korres et al [39] found that when use of grass biomethane in a car is included (well to wheel), the GHG savings are 18% lower than for well to tank analysis. Luo et al. [30] reported that expanding boundaries to include car driving as well as food and fodder production, led to lower GWP but higher impacts in other environmental categories (Table 1).

The reference system for a biofuel is typically a fossil fuel system delivering the same service, thus having the same function. The EU RED sets a reference value based on fossil fuels. This value

represents the actual average GHG emissions from petrol and diesel within the EU that is set at 83.8 g CO₂ eq / MJ for both fuels. Several of the reviewed studies follow the RED recommendations to calculate GHG reduction. Thamsirirotj and Murphy [34] used diesel as a reference system for biodiesel and Kaufman et al. [40] used gasoline for bioethanol.

The choice of reference system is not always straightforward. If biomethane displaces natural gas (as might be the case in a country with a high penetration of NGVs), then the savings in displacing natural gas (at 50.3 g CO₂ eq / MJ natural gas) [41] appear significantly less than if displacing petrol or diesel (at 83.8 g CO₂ eq / MJ), as might be the case in a country with a low penetration of NGVs. Generally, the reduction in GHG emissions will be higher if biofuel systems are compared with carbon intensive fuels, such as coal, and lower if compared with ‘cleaner fuels’, such as natural gas. In the majority of studies, the boundaries of the reference system did not extend beyond the production and use of fossil fuel [33,34,39,40,42]. However, Börjesson and Berglund [43,44] defined boundaries that included also the production of mineral fertilizers and alternative uses of the raw materials or land. By expanding the system’s boundaries, Börjesson and Berglund [43,44] detected potential indirect benefits derived from biogas systems linked to changes in handling of feedstocks and digestate.

3.4 Allocation methodology

If process chains deliver more than one product, all system flows must be divided between different products delivered by the system. This division procedure is called allocation whereby all flows are weighted and divided between the products of the system in proportion to the products’ energy content, mass or market value (Fig. 3). Another approach is subdivision, in which multifunctional processes are sub-divided into sub-processes, and separate data are collected for each mono-functional process [45]. No-allocation approach is the most conservative; all burdens are assigned to the main product.

The third major approach is system expansion, in which the boundaries of the system are expanded to include the functions and life cycles of co-products. System expansion and substitution are often used as synonyms. However, while the former approach is only about expanding boundaries, the latter considers all products and/or functions that can be replaced by the co-products and by-products of the system under analysis. For example, digestate as a co-product of a biogas system can be used as fertilizer and therefore the system gets credits for reducing the use of mineral fertilizers [46].

Despite the fact that choosing an allocation methodology is a fundamental step in LCA, different organisations recommend different approaches (Table 2) and several studies found that different allocation approaches can lead to completely different results [33,40,42].

3.4.1 Comparing biodiesel and grass biomethane

Thamsiriroj and Murphy [33] used three different allocation approaches to analyse rapeseed biodiesel, tallow biodiesel, UCO (used cooking oil) biodiesel, and grass biomethane. They found the biggest difference when assessing tallow biodiesel, with GHG savings varying between 33% (no allocation) and 150% (substitution approach). In the case of grass biomethane, GHG savings increased from 54% (no allocation) to 129% (system expansion). The simplest system, UCO biodiesel, seemed the least affected by the choice of the allocation method.

3.4.2 LCA comparison of rapeseed biodiesel system using various allocation approaches

Stephenson et al. [47] considered that an allocation based on direct substitution was the most appropriate for rapeseed biodiesel system (scenario 2; Fig. 4). However, if the product being replaced is a by-product of another process, direct substitution becomes difficult to implement, and therefore Stephenson et al. applied allocation based on market prices (scenarios 1a and 1b; Fig. 4).

Thamsiriroj and Murphy [48] tested various scenarios, including no-allocation (scenario 0; Fig. 4), and substitution of various co-products (scenarios 3-6; Fig. 4). Compared to economic allocation (1a and 1b; Fig. 5), the direct substitution (scenario 2; Fig. 4) resulted in higher GHG savings and lower total energy consumption. If electricity and heat generated from rapeseed meal in CHP were used to substitute grid electricity and heat from coal or gas, the GWP decreased by 92% and total energy requirements by 216%. With the no-allocation method, however, the reduction in GHG emissions was only 28%. The highest GHG savings (135%) resulted from the use of rape cake for animal feed, glycerol for heat production, and straw for thermal energy (scenario 4; Fig. 4). Using rape cake as animal feed saved GHG emissions from the production and transport of soybean meal, usually imported to Ireland from South America. Stephenson et al. [47] did not consider the burden of fodder production when rape meal is used to generate energy.

3.4.3 Assessing corn stover-based ethanol using system expansion, and allocation by mass, energy and economic value

In a case study of corn stover ethanol, Luo et al. [30] showed that using an economic allocation gave much higher results for GWP of bioethanol in comparison to mass/ energy allocation approaches. This is because the corn/ stover allocation ratio shifted from 1.7 to 7.5 when switching from mass/ energy allocation to economic allocation.

3.4.4 Assessing bioethanol using six allocation methodologies

Kraatz et al. [42] analyzed ethanol production from corn, with dried distillers grains and solubles (DDGS) as co-product. Using no-allocation approach and system expansion resulted in the highest energy intensity and highest GWP (see section 3.5). Conversely, mass, energy and economic allocation gave the lowest values for energy intensity and GWP of bioethanol produced.

3.5 Impact categories

Life cycle impact assessment (LCIA) methodologies model the pathway of substances and link them to effects. There is a large array of LCIA methodologies that propose diverse indicators or/and calculate the same indicator using different models. The International Reference Life Cycle Data System (ILCD) handbook reviews a wide range of methods for impact assessment, and provides LCA practitioners with recommendation on indicators and models used in LCIA [49,50]. The handbook was developed for LCAs in European context by the European Commission Joint Research Centre. EDIP 2003, ReCiPe or CML 2001 quoted in this study, are widely used methods [51]. The midpoint approach translates environmental impacts into mechanisms such as acidification, eutrophication, or climate change, while endpoint methodologies concentrate on damages and express impacts on the three following: human health, ecosystems and natural resources [52,53].

3.5.1 LCA based on energy and carbon balances

The majority of biofuel LCAs in the literature look only at GHG emissions or GWP, and/or energy balance [13]. From 39 papers sampled in Science Direct that used LCA in the title, about half examined both carbon and energy, while only 26% considered also other environmental impacts (Fig. 5). Stephenson et al. [47] reported on GWP and primary energy requirement (EDIP 2003) [54]. Thamsiriroj and Murphy [34] calculated GHG emissions and reduction according to EU RED recommendations, as well as the gross and net energy of both rapeseed and palm oil biodiesel. A similar approach was employed by Smyth et al. [55] and Korres et al. [39] assessing the sustainability of grass biomethane. In a paper by Kraatz et al., corn grain ethanol was assessed using energy intensity and GHG (Fig. 6) [42]. When looking at energy intensity, electricity consumption, drying of DDGS and corn farming show the highest contribution to the overall impact. This changed when looking at GHG, where 70% of impact comes from electricity alone.

3.5.2 LCA based on impact factors beyond carbon and energy

Measuring of sustainability in terms of impacts beyond carbon and/or energy often gave different results to when just carbon and/or energy were assessed. Aguirre-Villegas et al. [56] used four sustainability indicators: GWP; ammonia emissions; depletion of fossil fuel (DFF); and nutrient form and fate. They found that the anaerobic digestion (AD) pathway in comparison to other manure utilisations had the lowest values for GWP and DFF, but had the highest NH₃ emissions. Tufvesson et al. [36] in assessing biogas from industrial residues looked at GHG emissions, eutrophication, acidification, and energy balance. While GHG emissions were reduced whatever the substrate, impacts of both eutrophication and acidification were higher for biogas than fossil fuel systems. Only

Poeschl et al. [37,38] included land use change indicators (land transformation and occupation) as a part of the ReCiPe method [51].

4. Discussion: overcoming the challenges

4.1 Existing LCA frameworks

From the frameworks listed in Table 2, BIOMITRE and RED are the only one specifically developed for biofuels and biomass. RED also provides the most detailed recommendations on LCA of biofuels. BioGrace is currently the only integrated tool that complies with RED and can be used by farmers, policy makers and consultants within Europe [57]. It is an intuitive tool with simple interface that allows even an unexperienced LCA analyst to get a quick GHG calculation [24]. The tool provides also a liberty to change parameters and introduce more specific data. However, BioGrace can be applied only for GHG calculations. Moreover, the RED does not give any recommendation on extending the impact assessment beyond carbon. Also, despite the harmonisation, the RED still permits methodological choices that can lead to different results for same biofuel pathway. [58]

4.2 Functional unit

The choice of FUs should reflect biofuel life cycle stages (Fig. 7). Thus, if feedstock requires agricultural land, then LCA results should be reported on a per ha basis, and if biofuel is produced for transportation, then results should be reported on a per km basis. LCA results as per each life cycle stage should be available using different FU.

4.3 System boundaries and reference system

The definition of the system's boundaries and choice of the reference system are crucial, as the results of LCA vary according to the reference system chosen. In order to present a comprehensive understanding of the system, boundaries should be expanded to include co-products, by-products and residues (Fig. 7). The boundaries of the reference system should be the same as those of the primary system under analysis, and the choice of reference system should be informed by the goal of the analysis. It may be appropriate to define a reference system for each stage of the life cycle process, such as alternative land use and LCA of products that are being replaced by co- and by-products. However, the authors recognise that expanding the reference system boundaries and using multiple reference systems can considerably increase analysis complexity, and therefore recommend that the primary focus is on defining a reference system according to the analysis goal.

4.4 Allocation methodology

From the assessed studies, LCA results depend heavily on type of allocation chosen. Van der Voet et al. stressed that substitution implies higher variability in the results [14]. However, the authors believe

that co- and by-products should be included in biofuel LCA. Complex processes should be subdivided and data collected for each sub-process by linking of inputs and outputs to products, and co- and by-products. If this is not possible due to lack of specific data and/or multiplicity of co-/ by-products, then substitution should be applied (Fig. 7).

4.5 Impact categories

Since the majority of LCAs look only at GHG and energy balance, this can lead to the problem of burden shifting; where a biofuel system might achieve a high level of GHG reduction but could also impact the environment in other ways, for example through acidification and eutrophication [30]. In line with previous studies [14,17,36–38,56], the authors recommend broadening LCAs to include impacts other than just carbon and energy. The ISO does not set a list of recommended impact categories for life cycle impact assessment, but highlights the importance of choosing these in line with the goal and scope of the study [15].

A comprehensive LCA study would investigate a range of environmental impacts such as climate change, impact on human health, ecotoxicity, acidification and eutrophication of environment, ozone layer depletion. While assessment of all these factors would certainly be desirable to gain a full understanding of the system, it may not be practical due to time and resource constraints. A further difficulty is the current lack of knowledge of some parameters and/or their poor integration in LCA studies, particularly indirect effects such as land use change and nitrogen emissions [20,59].

The authors limited the number of recommended indicators to the five listed in Table 3. The ILCD handbook was employed to assess the existing indicators for climate change, acidification, eutrophication and land use. Only the midpoint categories were considered. Both mid- and endpoint approaches have their advantages and disadvantages, but midpoint categories are much more accurate and precise, and bring less uncertainty to the model, unlike the endpoint approach that requires weighting of the categories [52].

To assess climate change, all LCIA methodologies use the GWP midpoint indicator developed by the Intergovernmental Panel on Climate Change (IPCC) [50]. The GWP should be always based on the latest IPCC report, in this case the Fifth Assessment Report [60]. GWP can be calculated over a 20, 50 and 100-year timeframe. Well-mixed GHGs, such as CO₂, CH₄, and N₂O (including direct and indirect emissions from NH₃ and NO) are included. The GWP unit is kg CO₂ eq.

Acidification is mainly caused by the airborne acidifying substances, such as ammonia (NH₃) (after nitrification in the soil when nitrite is produced), nitrogen oxides (NO_x) and sulphur dioxide (SO₂) (largely from fossil fuels combustion) [61]. The ILCD evaluated the accumulated exceedance (AE) model as the most suitable [52,53,62]. This method is widely accepted and used by the European Commission and the United Nation Economic Commission for Europe for policy purposes. It uses critical load of nutrients to quantify the sensitivity of the ecosystem. It also provides characterization factors that are country specific. It is expressed in moles of hydrogen ion (H⁺) eq.

Eutrophication potential examines the impacts of the surplus of nitrogen and phosphorus on the terrestrial and aquatic ecosystems (marine and freshwater). Terrestrial eutrophication is caused by deposition of airborne N emissions, such as NO_x (combustion processes), and NH_3 (agriculture). For terrestrial eutrophication, ILCD recommends the AE model [52,53,62]. The indicator is expressed in kg N eq [52]. Freshwater and marine eutrophication is induced by waterborne emissions, such as nitrate, phosphate and other N and P compounds [52]. It is recommended to use the ReCiPe method, as it models best the aquatic fate of emissions; however it is restricted only to European countries. The indicator is expressed in kg P eq.

Land use indicators reflect the changes to ecosystems due to the effects of land occupation and transformation. To assess the impact of land use the ILCD handbook recommended the method by Milà i Canals et al., based on soil organic matter (SOM) [63,64]; however the level of recommendation is a grade lower than for the other impact categories discussed above [50]. The drawback of this method is that the LCA practitioner must calculate the case-specific characterisation factors based on collected data, such as SOM value before and after the land occupation and SOM value of the reference system. Moreover, the method presents a limited impact indicator based on SOM that considers soil quality but does not include the impact on soil biodiversity [52]. Alternatively, the midpoint ReCiPe method can be applied, but it accounts only for surface area of transformed and occupied land (expressed in m^2).

An energy indicator is typically associated with the assessment of energy vectors such as biofuels. It requires thorough data collection on energy inputs and outputs. It can take various forms, such as: 1) energy balance (energy output to input ratio), 2) net energy (gross energy of the product minus parasitic energy demand of the processes), 3) land use energy efficiency (for land-based biofuels; energy produced per unit area).

Traditionally, LCA is a tool for assessment of global impacts [65]. This is still valid for climate change, but for impacts such as acidification and eutrophication that occur locally, there is a need for country- or site-specific characterisation factors. ReCiPe and CML methods include the European average factor [17,50], while Seppala et al [53] and Posch et al [62] went even further to include EU country-specific factors for acidification and terrestrial eutrophication. Finnveden and Nilsson argue that the site-specific factors are needed to allow including the local conditions into the model [17].

To conclude, there is a need for a framework on impact categories for biofuels assessment. These should include at least the categories described above: climate change, acidification, eutrophication, land use, and energy. Further research should provide LCA practitioners with site-specific factors for acidification, eutrophication and land use.

5. Concluding remarks

A sound evaluation of biofuel systems requires conducting a full cradle to grave LCA. Valid LCA studies should consider other sustainability indicators in addition to GHG emissions and energy

balances. Standard requirements should include functional unit, system boundaries, allocation methodology, and environmental indicators. This unified methodology will allow comparing biofuel LCA studies, which currently is not possible as different studies follow different rules. Whereas it is preferable that full LCA is carried out in academia, industry should have access to a simplified and cost-effective version of LCA. LCA is a powerful tool but needs to continue to be refined as knowledge of the science grows. The recommendations outlined in this paper should go some way towards achieving this.

References

- [1] U.S. Energy Information Agency, International Energy Outlook 2013, Outlook 2013. (2013) 312. doi:EIA-0484(2013).
- [2] European Parliament and Council, Directive 2009/28/EC of the European Parliament and of the Council of 23 April 2009 on the promotion of the use of energy from renewable sources and amending and subsequently repealing Directives 2001/77/EC and 2003/30/EC, Official Journal of the European Union, OJ L 140, 5.6.2009, pp. 16-47, 2009.
- [3] B.D. Yacobucci, K.S. Bracmort, Calculation of Lifecycle Greenhouse Gas Emissions for the Renewable Fuel Standard, (2009) 1–12.
- [4] W.E. Tyner, The US Ethanol and Biofuels Boom: Its Origins, Current Status, and Future Prospects, *Bioscience*. 58 (2008) 646. doi:10.1641/B580718.
- [5] D. Songstad, P. Lakshmanan, J. Chen, W. Gibbons, S. Hughes, R. Nelson, Historical perspective of biofuels: Learning from the past to rediscover the future, *Biofuels Glob. Impact Renew. Energy, Prod. Agric. Technol. Adv.* 45 (2011) 1–7. doi:10.1007/978-1-4419-7145-6_1.
- [6] R. Rathmann, A. Szklo, R. Schaeffer, Land use competition for production of food and liquid biofuels: An analysis of the arguments in the current debate, *Renew. Energy*. 35 (2010) 14–22. doi:10.1016/j.renene.2009.02.025.
- [7] A. Jensen, L. Hoffman, B. Moller, S. Anders, et al., *Life Cycle Assessment: A guide to approaches, experiences and information sources*, 1997.
- [8] M. Brandão, G. Heath, J. Cooper, What Can Meta-Analyses Tell Us About the Reliability of Life Cycle Assessment for Decision Support?, *J. Ind. Ecol.* 16 (2012) 3–7. doi:10.1111/j.1530-9290.2012.00477.x.
- [9] G. Reinhardt, Overview, status and prospects on LCA for algae products, in: Keynote Speech. 3rd Eur. Work. Life Cycle Anal. Algal Based Biofuels Biomater. , Brussels, 2015.
- [10] G. Thomassen, M. Van Dael, B. Lemmens, S. Van Passel, A sustainability assessment framework for algal-based biorefineries, in: Ban, Marko, et al. (Eds.), *Digit. Proc. 10th Conf. Sustain. Dev. Energy, Water Environ. Syst. - SDEWES2015*, Zagreb: University of Zagreb,

- Faculty of Mechanical Engineering and Naval Architecture, 2015: pp. 1–21.
- [11] A. Benoist, D. Dron, A. Zoughaib, Origins of the debate on the life-cycle greenhouse gas emissions and energy consumption of first-generation biofuels - A sensitivity analysis approach, *Biomass and Bioenergy*. 40 (2012) 133–142. doi:10.1016/j.biombioe.2012.02.011.
- [12] E. Gnansounou, A. Dauriat, J. Villegas, L. Panichelli, Life cycle assessment of biofuels: Energy and greenhouse gas balances, *Bioresour. Technol.* 100 (2009) 4919–4930. doi:10.1016/j.biortech.2009.05.067.
- [13] F. Cherubini, A.H. Strømman, Life cycle assessment of bioenergy systems: State of the art and future challenges, *Bioresour. Technol.* 102 (2011) 437–451. doi:10.1016/j.biortech.2010.08.010.
- [14] E. van der Voet, R.J. Lifset, L. Luo, Life-cycle assessment of biofuels, convergence and divergence, *Biofuels*. 1 (2010) 435–449. doi:10.4155/bfs.10.19.
- [15] International Standard Organization (ISO), ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines, Geneva : International Organization for Standardization, 2006. http://www.iso.org/iso/catalogue_detail?csnumber=38498.
- [16] M.K. Raman Sujatha, Mohr Alison, Helliwell Richard, Ribeiro Barbara, Shortall Orla, Smith Robert, Integrating social and value dimensions into sustainability assessment of lignocellulosic biofuels, *Biomass and Bioenergy*. (2015) 1–14. doi:10.1016/j.biombioe.2015.04.022.
- [17] D. Lazarevic, M. Martin, Life cycle assessments, carbon footprints and carbon visions: Analysing environmental systems analyses of transportation biofuels in Sweden, *J. Clean. Prod.* 137 (2016) 249–257. doi:10.1016/j.jclepro.2016.07.075.
- [18] C.E. Ridley, C.M. Clark, S.D. Leduc, B.G. Bierwagen, B.B. Lin, A. Mehl, et al., Biofuels: network analysis of the literature reveals key environmental and economic unknowns., *Environ. Sci. Technol.* 46 (2012) 1309–15. doi:10.1021/es2023253.
- [19] F. Cherubini, GHG balances of bioenergy systems - Overview of key steps in the production chain and methodological concerns, *Renew. Energy*. 35 (2010) 1565–1573. doi:10.1016/j.renene.2009.11.035.
- [20] S.C. Davis, K.J. Anderson-Teixeira, E.H. DeLucia, Life-cycle analysis and the ecology of biofuels, *Trends Plant Sci.* 14 (2009) 140–146. doi:10.1016/j.tplants.2008.12.006.
- [21] International Standard Organization (ISO), ISO 14040:2006 Environmental management -- Life cycle assessment -- Principles and framework, 2006. http://www.iso.org/iso/catalogue_detail?csnumber=37456.
- [22] Defra, DECC, BIS, PAS 2050: 2011 Specification for the assessment of the life cycle greenhouse gas emissions of goods and services, 2011. doi:978 0 580 71382 8.
- [23] R. Horne, M. R, BIOMITRE Technical Manual, 2004. <http://www.globalbioenergy.org/bioenergyinfo/bioenergy-and-climate->

- change/detail/en/c/19282/.
- [24] BioGrace, User manual for the BioGrace Excel tool. Version 4d, (2015).
www.biograce.net/home.
- [25] G. Rebitzer, T. Ekvall, R. Frischknecht, D. Hunkeler, G. Norris, T. Rydberg, et al., Life cycle assessment Part 1: Framework, goal and scope definition, inventory analysis, and applications, *Environ. Int.* 30 (2004) 701–720. doi:10.1016/j.envint.2003.11.005.
- [26] M. Alvarado-Morales, A. Boldrin, D.B. Karakashev, S.L. Holdt, I. Angelidaki, T. Astrup, Life cycle assessment of biofuel production from brown seaweed in Nordic conditions, *Bioresour. Technol.* 129 (2013) 92–99. doi:10.1016/j.biortech.2012.11.029.
- [27] D. Luo, Z. Hu, D.G. Choi, V.M. Thomas, M.J. Realff, R.R. Chance, Life cycle energy and greenhouse gas emissions for an ethanol production process based on blue-green algae., *Environ. Sci. Technol.* 44 (2010) 8670–8677. doi:10.1021/es1007577.
- [28] X. Wang, E. Nordlander, E. Thorin, J. Yan, Microalgal biomethane production integrated with an existing biogas plant: A case study in Sweden, *Appl. Energy*. 112 (2013) 478–484. doi:10.1016/j.apenergy.2013.04.087.
- [29] J. Yang, M. Xu, X. Zhang, Q. Hu, M. Sommerfeld, Y. Chen, Life-cycle analysis on biodiesel production from microalgae: Water footprint and nutrients balance, *Bioresour. Technol.* 102 (2011) 159–165. doi:10.1016/j.biortech.2010.07.017.
- [30] L. Luo, E. Van Der Voet, G. Huppes, H. a. Udo De Haes, Allocation issues in LCA methodology: A case study of corn stover-based fuel ethanol, *Int. J. Life Cycle Assess.* 14 (2009) 529–539. doi:10.1007/s11367-009-0112-6.
- [31] G. Zaimes, M. Borkowski, V. Khanna, Life-Cycle Environmental Impacts of Biofuels and Co-products, in: V. Gupta, M. Tuohy (Eds.), *Biofuel Technol. Recent Dev.*, Springer-Verlag Berlin Heidelberg, 2013: p. 471–99.
- [32] S. Lettens, B. Muys, R. Ceulemans, E. Moons, J. Garcia, P. Coppin, Energy budget and greenhouse gas balance evaluation of sustainable coppice systems for electricity production, *Biomass and Bioenergy*. 24 (2003) 179–197. doi:10.1016/S0961-9534(02)00104-6.
- [33] T. Thamsiriroj, J.D. Murphy, A critical review of the applicability of biodiesel and grass biomethane as biofuels to satisfy both biofuel targets and sustainability criteria, *Appl. Energy*. 88 (2011) 1008–1019. doi:10.1016/j.apenergy.2010.10.026.
- [34] T. Thamsiriroj, J.D. Murphy, Is it better to import palm oil from Thailand to produce biodiesel in Ireland than to produce biodiesel from indigenous Irish rape seed?, *Appl. Energy*. 86 (2009) 595–604. doi:10.1016/j.apenergy.2008.07.010.
- [35] G. Sarantakos, C. Opal, Roundtable on Sustainable Biofuels Substitution versus allocation - definitions, 2006 (2008) 1–5.
- [36] L.M. Tufvesson, M. Lantz, P. Börjesson, Environmental performance of biogas produced from industrial residues including competition with animal feed - Life-cycle calculations according

- to different methodologies and standards, *J. Clean. Prod.* 53 (2013) 214–223.
doi:10.1016/j.jclepro.2013.04.005.
- [37] M. Poeschl, S. Ward, P. Owende, Environmental impacts of biogas deployment - Part I: Life Cycle Inventory for evaluation of production process emissions to air, *J. Clean. Prod.* 24 (2012) 168–183. doi:10.1016/j.jclepro.2011.10.039.
- [38] M. Poeschl, S. Ward, P. Owende, Environmental impacts of biogas deployment - Part II: Life Cycle Assessment of multiple production and utilization pathways, *J. Clean. Prod.* 24 (2012) 184–201. doi:10.1016/j.jclepro.2011.10.030.
- [39] N.E. Korres, A. Singh, A.-S. Nizami, J.D. Murphy, Is grass biomethane a sustainable transport biofuel?, *Biofuels, Bioprod. Biorefining.* 4 (2010) 310–325. doi:10.1002/bbb.
- [40] A.S. Kaufman, P.J. Meier, J.C. Sinistore, D.J. Reinemann, Applying life-cycle assessment to low carbon fuel standards-how allocation choices influence carbon intensity for renewable transportation fuels, *Energy Policy.* 38 (2010) 5229–5241. doi:10.1016/j.enpol.2010.05.008.
- [41] Energy Information Administration, Independent Statistics & Analysis. CO2 emissions, (2013). http://www.eia.gov/environment/emissions/co2_vol_mass.cfm (accessed September 5, 2014).
- [42] S. Kraatz, J.C. Sinistore, D.J. Reinemann, Energy intensity and global warming potential of corn grain ethanol production in Wisconsin (USA), *Food Energy Secur.* 2 (2013) 207–219. doi:10.1002/fes3.27.
- [43] P. Börjesson, M. Berglund, Environmental systems analysis of biogas systems-Part I: Fuel-cycle emissions, *Biomass and Bioenergy.* 30 (2006) 469–485.
doi:10.1016/j.biombioe.2005.11.014.
- [44] P. Börjesson, M. Berglund, Environmental systems analysis of biogas systems-Part II: The environmental impact of replacing various reference systems, *Biomass and Bioenergy.* 31 (2007) 326–344. doi:10.1016/j.biombioe.2007.01.004.
- [45] S. Kraatz, D.J. Reinemann, W.E. Berg, Energy inputs for corn production in Wisconsin (U.S.) and Germany, *Appl. Eng. Agric.* 25 (2009) 653–662.
- [46] M. Brander, Substitution : a Problem with Current Life Cycle Assessment Standards, (2012) 3.
- [47] A.L. Stephenson, J.S. Dennis, S.A. Scott, Improving the sustainability of the production of biodiesel from oilseed rape in the UK, *Process Saf. Environ. Prot.* 86 (2008) 427–440.
doi:10.1016/j.psep.2008.06.005.
- [48] T. Thamsiriroj, J.D. Murphy, Can rape seed biodiesel meet the European union sustainability criteria for biofuels?, *Energy and Fuels.* 24 (2010) 1720–1730. doi:10.1021/ef901432g.
- [49] European Commission -- Joint Research Centre -- Institute for Environment and Sustainability, International Reference Life Cycle Data System (ILCD) Handbook -- General guide for Life Cycle Assessment -- Detailed guidance, 2010. doi:10.2788/38479.
- [50] JRC European commission, ILCD Handbook: Recommendations for Life Cycle Impact

- Assessment in the European context, 2011. doi:10.278/33030.
- [51] M. Goedkoop, R. Heijungs, A. De Schryver, J. Struijs, R. van Zelm, ReCiPe 2008. A LCIA method which comprises harmonised category indicators at the midpoint and the endpoint level. Report 1. Characterisation., 2013. doi:http://www.lcia-recipe.net.
- [52] European Commission - Joint Research Centre - Institute for Environment and Sustainability, International Reference Life Cycle Data System (ILCD) Handbook: Framework and Requirements for Life Cycle Impact Assessment Models and Indicators, 2010. doi:10.2788/38719.
- [53] J. Seppälä, M. Posch, M. Johansson, J.-P. Hettelingh, Country-dependent Characterisation Factors for Acidification and Terrestrial Eutrophication Based on Accumulated Exceedance as an Impact Category Indicator (14 pp), *Int. J. Life Cycle Assess.* 11 (2006) 403–416. doi:10.1065/lca2005.06.215.
- [54] L.C. Dreyer, A.L. Niemann, M.Z. Hauschild, Comparison of Three Different LCIA Methods: EDIP97, CML2001 and Eco-indicator 99, *Int. J. Life Cycle Assess.* 8 (2003) 191–200. doi:10.1007/BF02978471.
- [55] B.M. Smyth, J.D. Murphy, C.M. O’Brien, What is the energy balance of grass biomethane in Ireland and other temperate northern European climates?, *Renew. Sustain. Energy Rev.* 13 (2009) 2349–2360. doi:10.1016/j.rser.2009.04.003.
- [56] H. Aguirre-Villegas, R. Larson, D.J. Reinemann, From waste-to-worth: energy, emissions, and nutrient implications of manure processing pathways, *Biofuels, Bioprod. Biorefining.* (2014). doi:10.1002/bbb.
- [57] C. Peter, K. Helming, C. Nendel, Do greenhouse gas emission calculations from energy crop cultivation reflect actual agricultural management practices? – A review of carbon footprint calculators, *Renew. Sustain. Energy Rev.* 67 (2016) 461–476. doi:10.1016/j.rser.2016.09.059.
- [58] A.M. Hennecke, M. Faist, J. Reinhardt, V. Junquera, J. Neeft, H. Fehrenbach, Biofuel greenhouse gas calculations under the European Renewable Energy Directive - A comparison of the BioGrace tool vs. the tool of the Roundtable on Sustainable Biofuels, *Appl. Energy.* 102 (2013) 55–62. doi:10.1016/j.apenergy.2012.04.020.
- [59] F. Cherubini, N.D. Bird, A. Cowie, G. Jungmeier, B. Schlamadinger, S. Woess-Gallasch, Energy- and greenhouse gas-based LCA of biofuel and bioenergy systems: Key issues, ranges and recommendations, *Resour. Conserv. Recycl.* 53 (2009) 434–447. doi:10.1016/j.resconrec.2009.03.013.
- [60] G. Myhre, D. Shindell, F.-M. Breon, W. Collins, J. Fuglestad, J. Huang, et al., Anthropogenic and natural radiative forcing, in: T.F. Stocker, D. Qin, G.-K. Plattner, M.M. Tignor, S. Allen, J. Boschung, et al. (Eds.), *Clim. Chang. 2013 Phys. Sci. Basis Contrib. Work. Gr. I to Fifth Assess. Rep. Intergov. Panel Clim. Chang.*, Cambridge, United Kingdom and New York, NY, USA: Cambridge University Press, 2013: p. 731.

- [61] European Commission - Joint Research Centre - Institute for Environment and Sustainability, Characterisation factors of the ILCD Recommended Life Cycle Impact Assessment methods: database and supporting information, 2012. doi:10.2788/60825.
- [62] M. Posch, J. Seppälä, J.P. Hettelingh, M. Johansson, M. Margni, O. Jolliet, The role of atmospheric dispersion models and ecosystem sensitivity in the determination of characterisation factors for acidifying and eutrophying emissions in LCIA, *Int. J. Life Cycle Assess.* 13 (2008) 477–486. doi:10.1007/s11367-008-0025-9.
- [63] L. Milà i Canals, C. Bauer, J. Depestele, A. Dubreuil, R.F. Knuchel, Key Elements in a Framework for Land Use Impact Assessment Within LCA Land Use in LCA, *Int. J. Life Cycle Assess.* 12 (2007) 5–15.
- [64] L. Milà i Canals, J. Romanyà, S.J. Cowell, Method for assessing impacts on life support functions (LSF) related to the use of “fertile land” in Life Cycle Assessment (LCA), *J. Clean. Prod.* 15 (2007) 1426–1440. doi:10.1016/j.jclepro.2006.05.005.
- [65] G. Finnveden, M. Nilsson, Site-dependent life-cycle impact assessment in Sweden, *Int. J. Life Cycle Assess.* 10 (2005) 235–239. doi:DOI 10.1065/lca2005.05.209.
- [66] UNFCCC Methodologies (Meth) Panel, Guidelines on apportioning emissions from production processes between main product and co- and by-products, Methodologies Panel Meeting 045, 2004. https://cdm.unfccc.int/Panels/meth/meeting/08/035/mp_035_an11.pdf.

Figures

Fig. 1. Methodology for selecting reviewed papers.

Fig. 2. Cradle to gate energy balance (GJ) and GHG balance (kg CO₂) of three biofuels. Data were expressed using in each case two FU: ha of land and GJ of biofuel. In [33] grass biomethane performed better regardless the FU, but there were bigger discrepancies between rapeseed biodiesel and grass biomethane results if FU was set as GJ of fuel (a.). In [34], if results were expressed using ha of land, rapeseed biodiesel performed better (less kg CO₂ ha⁻¹), while if FU was switched to GJ of fuel, palm oil biodiesel was better (less kg CO₂ GJ⁻¹) (b.).

Fig. 3. Allocation approaches.

Fig. 4. Scenarios for LCA comparison of rapeseed biodiesel based on Stephenson et al. [47] and Thamsiriroj and Murphy [48].

Fig. 5. Percentage of peer-reviewed LCA studies of biofuels by impact categories assessed. 39 peer-reviewed papers were sampled using Science Direct. All papers were published between 2008 and 2015 using “LCA” and “biofuel” in title.

Fig. 6. Contribution of the three most impacting life cycle stages of corn grain ethanol to the total environmental impact measured in energy intensity (blue) and GWP (red) [42]. Electricity was always the highest contributor to both GWP and energy intensity, but the discrepancies between various life cycle stages were much lower if energy intensity is used as measure. Drying of DDGS has a much higher impact on energy intensity than on GWP.

Fig. 7. Flowchart with recommendations for biofuels LCA.

619 Tables

620 Table 1. Overview of sixteen selected papers on LCA.

Category	References	Product studied	Functional unit	System boundaries	Reference system	Allocation methodology	Impact categories
• Biodiesel							
	Stephenson et al. [47]	Rapeseed biodiesel	1 tonne of biodiesel	1. Crop production 2. Transport 3. Oil extraction 4. Biodiesel production 5. Distribution	Fallow set-aside (alternative land use)	1. Economic 2. Substitution	GWP and primary energy requirement based on EDIP 2003*
	Thamsiriroj and Murphy [34]	Biodiesel from 1. palm oil and 2. rapeseed	1 GJ biodiesel or 1 ha per year	1. Crop production 2. Transport 3. Oil extraction 4. Biodiesel production 5. Distribution	Diesel reference system	No allocation (all burden to biodiesel)	GHG and energy balance
	Thamsiriroj and Murphy [33]	Biodiesel from 1. rape seed, 2. tallow and 3. Used cooking oil, and 4. grass biomethane	1 GJ biodiesel or 1 ha per year	Variable	Fossil fuel reference system	1. No allocation 2. Energy 3. Substitution	GHG and energy balance
	Yang et al. [29]	Microalgae biodiesel	1 kg of biodiesel	1. Growing and harvesting 2. Drying 3. Oil extraction 4. Esterification	Alternative feedstocks	No allocation	Water footprint and nutrients balance
• Bioethanol							
	Kaufman et al. [40]	Ethanol from 1. corn-grain and 2. from corn stover	1 MJ of ethanol	1. Corn production 2. Transport 3. Ethanol refining (co-product of corn-grain ethanol can be fed to cattle; co-product of corn-stover ethanol, electricity is injected into the grid)	Gasoline reference system	1. Mass 2. Economic 3. Energy 4. System expansion 5. Subdivision	GHG
	Kraatz et al. [42]	Corn grain ethanol	1 kg of ethanol or 1 MJ of ethanol	1. Corn grain production 2. Transport 3. Ethanol refining 4. Use of stillage for biogas production or for animal fed production	Gasoline reference system	1. No allocation, 2. Mass 3. Economic 4. Energy 5. Subdivision 6. System expansion	GWP, energy intensity, and net energy value
	Luo et al. [30]	Corn stover ethanol	1 km driven in a midsize car	1. Agricultural production 2. Transport 3. Pretreatment 4. Fermentation 5. Distillation 6. Refining 7. Blending 8. Car driving	Gasoline reference system	1. Mass 2. Economic 3. Energy 4. System expansion	GWP, abiotic depletion, ozone layer depletion, photochemical oxidation, human and ecotoxicity, acidification and eutrophication based on CML 2001**
• Biomethane							
	Korres et al. [39]	Grass biomethane	1 m ³ of biomethane per year, and 1 MJ energy replaced	1. Crop production 2. Biogas production 3. Upgrading and compressing of biomethane 4. Use in a bi-fuel car 5. Digestate use	Diesel reference system	No allocation	GHG and energy balance
	Smyth et al. [55]	Grass biomethane	1 ha per year	1. Crop production 2. Biogas production 3. Upgrading and compressing of biomethane 4. Digestate use	1 st generation biofuels (palm oil biodiesel and others)	No allocation	Energy balance
	Wang et al. [28]	Microalgal biomethane	1 GJ of biomethane	1. Algae cultivation (incl. production of photobioreactor) 2. Biogas production 3. Upgrading of biogas	Alternative biomethane production from ley crop	Substitution (avoided fertilizer)	GHG and energy balance
• Biogas							

Alvarado-Morales et al. [26]	Biogas from brown seaweed (and bioethanol + biogas)	1 tonne of dry seaweed	1 st scenario: 1. Seaweed production 2. Mechanical pretreatment 3. Biogas production 4. Energy production 2nd scenario: 3. Bioethanol production 4. Blending 5. Car driving 6. Use of stillage for biogas production	Coal-based electricity for biogas, and fossil gasoline for bioethanol	System expansion (avoided fertilizer and energy production, and fuel production)	GWP, acidification and terrestrial eutrophication based on EDIP 2003* method, and energy consumption
Börjesson and Berglund [43], and Börjesson and Berglund [44]	Biogas systems (ley crops, straw, sugar beet, manure, food waste, municipal organic waste)	1 MJ of biogas	1. Handling of raw materials (incl. crop cultivation) 2. Biogas production (farm-scale and large-scale biogas plants) 3. Biogas and digestate use	Various (fossil fuels and other bioenergy systems)	Based on dry matter content of the substrates	GWP, acidification, eutrophication, and photochemical oxidant creation potential
Poeschl et. al. [37] and Poeschl et. al. [38]	Biogas system (various scenarios incl. single feedstock and co-digestion of manure, straw, corn, grass, whole wheat plant, MSW, food waste, pomace, slaughterhouse waste, grease sludge)	1 tonne of organic material (feedstock)	1. Feedstock supply 2. Biogas production 3. Biogas utilization 4. Digestate processing and handling; (system expansion: production of chemical fertilizers, electricity generation with Germany's fuel mix, heat generation using natural gas, and imports of natural gas and transportation fuel)	Typical biogas production and utilization pathways for Germany	System expansion	18 midpoint and 3 endpoint indicators based on ReCiPe*** method
Tufvesson et al. [36]	Biogas from industrial residues (distiller's waste, rapeseed cake, whey permeate, fodder milk, and bakery residues)	1 MJ upgraded and compressed biogas	1. Transport of feedstocks 2. Biogas production including upgrading and compression 3. Digestate use (no allocation and system expansion) 4. Replacement of mineral fertilizer 5. Animal feed production (system expansion)	Petrol and diesel reference system	1. No allocation, 2. System expansion and 3. allocation rules based on the sustainability criteria defined by the EU RED	GHG, energy balance, eutrophication and acidification potential

* EDIP 2003: Impact assessment method developed by the Institute for Product Development at the Technical University of Denmark [54].

** CML 2001: Impact assessment method developed by the Institute of Environmental Sciences at Leiden University in Netherlands [54].


*** ReCiPe : Impact assessment method developed by various actors: PRé Consultants, CML Leiden University, Radboud University Nijmegen and RIVM Bilthoven, [51].

Table 2. Allocation methodologies according to different sources.


Institution	Recommended Approach
• Norm ISO 14044 (International Standard Organization)	whenever possible avoid allocation and instead use subdivision or system expansion [15]
• RED and BioGrace tool	allocation based on energy content (lower heating value) [2]
• BIOMITRE (BIOmass-based Climate Change MITigation through Renewable Energy)	allocation by economic value (although not ideal since market prices often fluctuate) [23]
• PAS (Publicly Available Specification for assessment of life cycle GHG of goods and services)	dividing processes into sub-processes or system expansion to include co-products, by-products, and waste; when neither of these is feasible, then allocation based on economic value should be applied [22]
• UNFCCC through Meth Panel (Methodologies Panel)	all available approaches [66]

Table 3. Recommendation for LCIA.

Impact categories	Indicators	Calculation and unit	Reasons
• Climate change	GWP or GHG	g or kg CO ₂ -equivalent	Following legislative requirements to calculate impact of biofuels on global warming and potential savings
• Energy	Energy balance, net energy, land use energy efficiency	Energy balance (output/input ratio), net energy (gross energy minus parasitic energy demand) land use efficiency (energy production per unit of land); kwh or MJ (per ha)	Traditional indicator related to biofuel energy efficiency
• Eutrophication (terrestrial and aquatic)	Accumulated exceedance (terrestrial), ReCiPe (aquatic)	Terrestrial: modelling following Seppala et al. [53,62]; kg N eq. Aquatic: ReCiPe; kg P eq. [51]	Terrestrial strongly correlated with agriculture and combustion (N compounds); aquatic with waterborne emissions (N and P compounds)
• Acidification	Accumulated exceedance	Modelling following Seppala et al. [53,62]; moles of hydrogen ion (H ⁺) eq.	Strongly correlated with transport and agriculture (N and S compounds)
• Land use	SOM or surface area of transformed and occupied land	mg SOM per year (deficit of SOM) [63,64] and m ² of transformed and occupied land [51]	Especially relevant for land-based biofuels

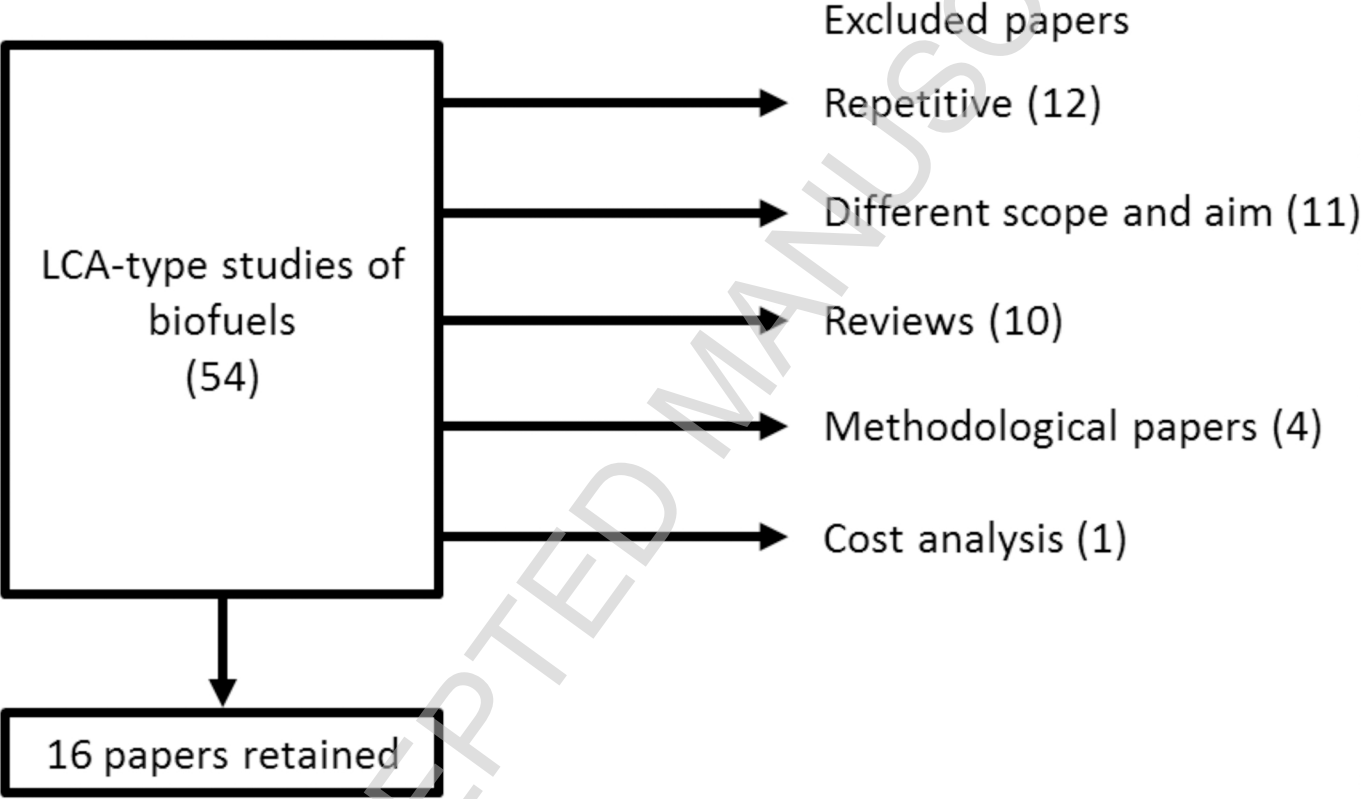


a.

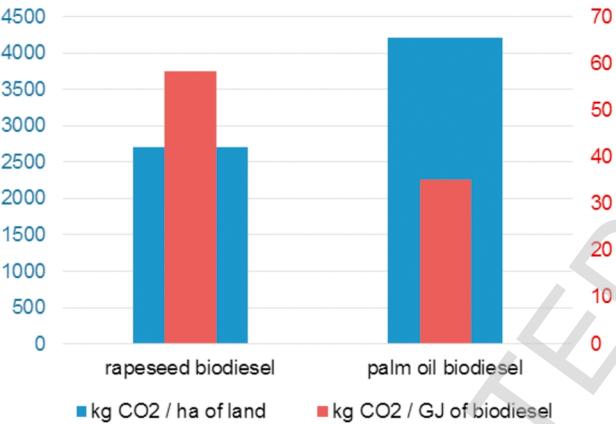
GHG [kg CO₂]

b.


Energy balance [GJ]

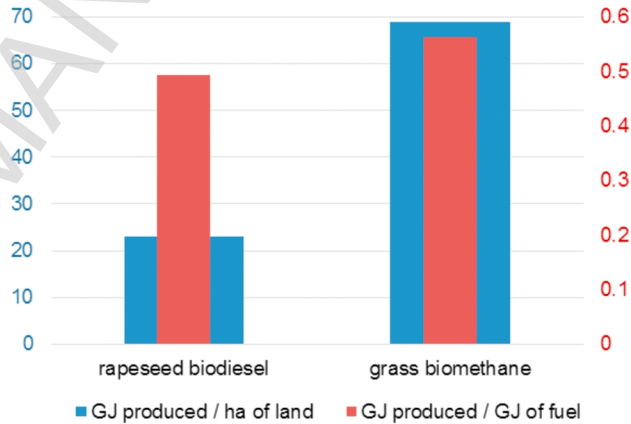


No allocation




Mass/ energy/ economic allocation

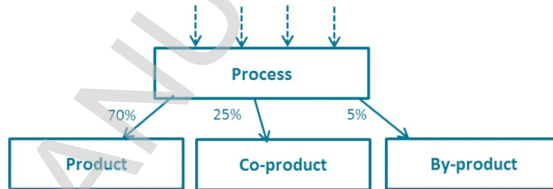


Subdivision

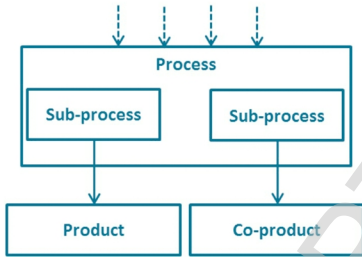

System expansion/ substitution

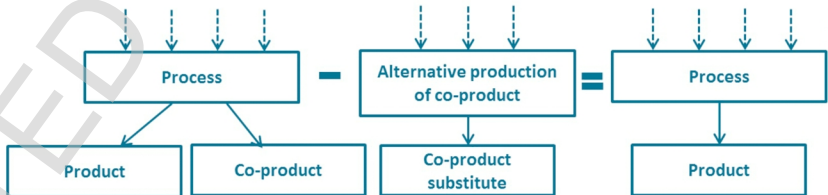

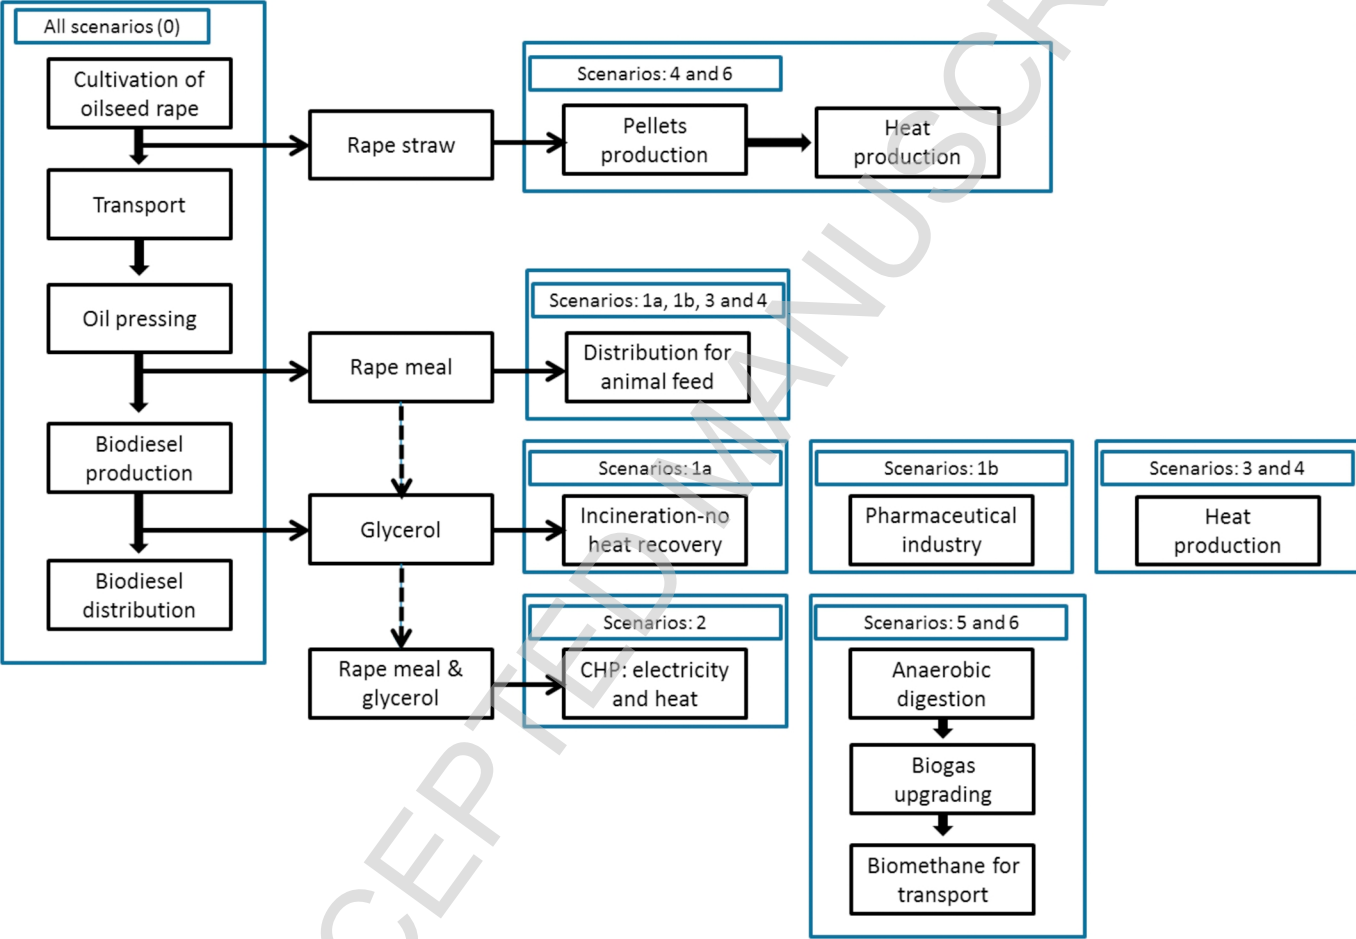

Impact categories

