



**QUEEN'S
UNIVERSITY
BELFAST**

Improving the training of the GANs with limited data via dual adaptive noise injection

Zhang, Z., Hua, Y., Sun, G., Wang, H., & McLoone, S. (2024). Improving the training of the GANs with limited data via dual adaptive noise injection. In *MM '24: Proceedings of the 32nd ACM International Conference on Multimedia* (pp. 6725-6734). Association for Computing Machinery. <https://doi.org/10.1145/3664647.3681509>

Published in:

MM '24: Proceedings of the 32nd ACM International Conference on Multimedia

Document Version:

Publisher's PDF, also known as Version of record

Queen's University Belfast - Research Portal:

[Link to publication record in Queen's University Belfast Research Portal](#)

Publisher rights

Copyright 2024 the authors.

This is an open access article published under a Creative Commons Attribution License (<https://creativecommons.org/licenses/by/4.0/>), which permits unrestricted use, distribution and reproduction in any medium, provided the author and source are cited.

General rights

Copyright for the publications made accessible via the Queen's University Belfast Research Portal is retained by the author(s) and / or other copyright owners and it is a condition of accessing these publications that users recognise and abide by the legal requirements associated with these rights.

Take down policy

The Research Portal is Queen's institutional repository that provides access to Queen's research output. Every effort has been made to ensure that content in the Research Portal does not infringe any person's rights, or applicable UK laws. If you discover content in the Research Portal that you believe breaches copyright or violates any law, please contact openaccess@qub.ac.uk.

Open Access

This research has been made openly available by Queen's academics and its Open Research team. We would love to hear how access to this research benefits you. – Share your feedback with us: <http://go.qub.ac.uk/oa-feedback>



Improving the Training of GANs with Limited Data via Dual Adaptive Noise Injection

Zhaoyu Zhang
School of EECS
Queen's University Belfast
Belfast, UK
zzhang55@qub.ac.uk

Yang Hua
School of EECS
Queen's University Belfast
Belfast, UK
Y.Hua@qub.ac.uk

Guanxiong Sun
Huawei Technologies Ltd
London, UK
gsun02@qub.ac.uk

Hui Wang
School of EECS
Queen's University Belfast
Belfast, UK
h.wang@qub.ac.uk

Seán McLoone
School of EECS
Queen's University Belfast
Belfast, UK
s.mcloone@qub.ac.uk

ABSTRACT

Recently, many studies have highlighted that training Generative Adversarial Networks (GANs) with limited data suffers from the overfitting of the discriminator (D). Existing studies mitigate the overfitting of D by employing data augmentation, model regularization, or pre-trained models. Despite the success of existing methods in training GANs with limited data, noise injection is another plausible, complementary, yet not well-explored approach to alleviate the overfitting of D issue. In this paper, we propose a simple yet effective method called Dual Adaptive Noise Injection (DANI), to further improve the training of GANs with limited data. Specifically, DANI consists of two adaptive strategies: adaptive injection probability and adaptive noise strength. For the adaptive injection probability, Gaussian noise is injected into both real and fake images for generator (G) and D with a probability p , respectively, where the probability p is controlled by the overfitting degree of D . For the adaptive noise strength, the Gaussian noise is produced by applying the adaptive forward diffusion process to both real and fake images, respectively. As a result, DANI can effectively increase the overlap between the distributions of real and fake data during training, thus alleviating the overfitting of D issue. Extensive experiments on several commonly-used datasets with both StyleGAN2 and FastGAN backbones demonstrate that DANI can further improve the training of GANs with limited data and achieve state-of-the-art results compared with other methods. Codes are available at <https://github.com/zzhang05/DANI>.

CCS CONCEPTS

• Computing methodologies → Computer vision.

KEYWORDS

GANs, Limited Data, Dual Adaptive Noise Injection.

ACM Reference Format:

Zhaoyu Zhang, Yang Hua, Guanxiong Sun, Hui Wang, and Seán McLoone. 2024. Improving the Training of GANs with Limited Data via Dual Adaptive Noise Injection. In *Proceedings of the 32nd ACM International Conference on Multimedia (MM '24)*, October 28–November 1, 2024, Melbourne, VIC, Australia. ACM, New York, NY, USA, 10 pages. <https://doi.org/10.1145/3664647.3681509>

1 INTRODUCTION

In recent years, Generative Adversarial Networks (GANs) [14] have achieved great success in generating contents, e.g., images [24, 27, 28, 60, 66, 67], videos [8, 17, 42], text [18, 54] and audio [29], for social media. These generated contents can be applied in various multimedia applications, such as talking face [56, 61]. However, the success of GANs relies on the availability of a large amount of data. Collecting and cleaning these large datasets can be expensive, time-consuming, and even infeasible. Consequently, training GANs with limited data has received great attention.

Recently, several approaches [7, 26, 69] have demonstrated that training GANs with limited data suffers from the overfitting of the discriminator (D), i.e., D becomes overly confident in distinguishing between real and fake data. To address this, existing methods employ various strategies such as data augmentation [7, 9, 23, 26, 69], model regularization [12, 34, 52], or pre-trained models [30, 46]. Despite the success of existing methods, noise injection [1, 4] is another plausible, complementary, yet not well-explored approach to alleviate the overfitting of D . Recent noise injection methods in GANs [2, 13, 22, 44, 48] have already shown their effectiveness in improving the training of GANs with a large amount of data. However, as stated in ADA [26], directly applying noise injection to GANs with limited data suffers from the leaking problem [26, 64, 65, 70], i.e., “noise augmentation leads to noisy results, even if there is none in the dataset”, which can highly influence the performance of GANs training under limited data settings.

In this paper, we propose a novel noise injection method for GANs with limited data, called Dual Adaptive Noise Injection (DANI). Specifically, DANI consists of two adaptive strategies, i.e., adaptive injection probability and adaptive noise strength. For the adaptive injection probability, we inject Gaussian noise into both real and fake images for G and D with a probability p , where the p is controlled by the overfitting degree of D adaptively. For the



This work is licensed under a Creative Commons Attribution International 4.0 License.

MM '24, October 28–November 1, 2024, Melbourne, VIC, Australia
© 2024 Copyright held by the owner/author(s).
ACM ISBN 979-8-4007-0686-8/24/10.
<https://doi.org/10.1145/3664647.3681509>

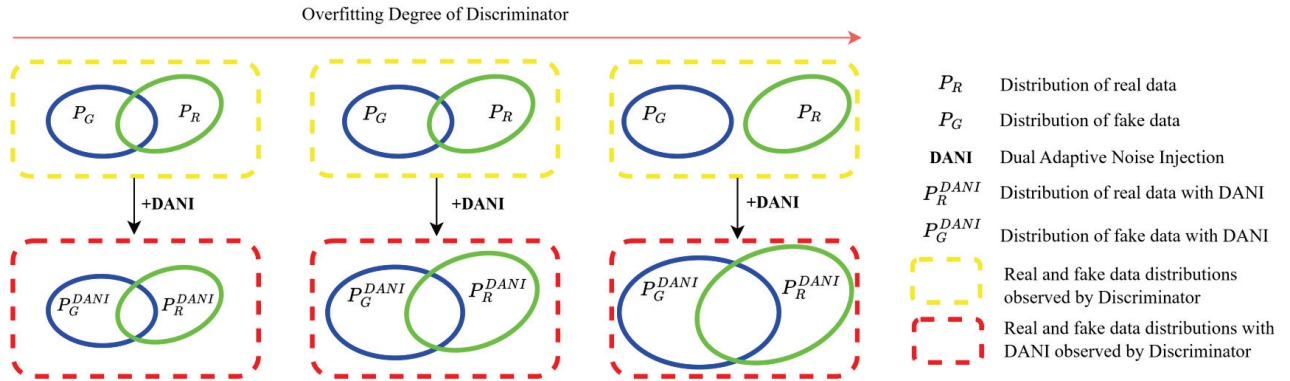


Figure 1: Schematic overview illustrating how DANI can benefit the training of GANs with limited data. Top: The real and fake data distributions observed by D during training. As the overfitting of D increases, D becomes increasingly confident in distinguishing between real and fake data, leading to a decrease in the overlap between the supports of real and fake data distributions observed by D . Finally, when D becomes overly confident, i.e., when D reaches optimality as pointed out in [2, 14], the overlapping parts disappear or can be ignored. Bottom: The real and fake data distributions with DANI observed by D during training. Applying DANI for both real and fake samples can effectively provide more overlapping parts between the supports of real and fake distributions during training, thus resulting in better performance [2, 55].

adaptive noise strength, we apply the adaptive forward diffusion process [20] to both real and fake images, respectively, to produce the Gaussian noise. Consequently, both adaptive strategies in DANI can effectively prevent the leaking problem caused by the noise injection. Furthermore, DANI can effectively alleviate the overfitting of D problem, i.e., D becomes overly confident in distinguishing the real and fake data. Specifically, we prove that DANI effectively increases the overlap between the supports of real and fake data distributions in GANs during training (see Theorem 3 in §3.2), as illustrated in Figure 1. Then, based on the conclusion in ADA [26], the increased overlap between the supports of real and fake data distributions provided by DANI strongly indicates that DANI mitigates D becoming overly confident in distinguishing real from fake data. As a result, DANI can alleviate the overfitting of D problem.

To sum up, the main contributions of this paper are as follows: (1) We propose a novel method called Dual Adaptive Noise Injection (DANI) for training GANs with limited data. DANI can effectively alleviate the overfitting of D and avoid the leaking problem. (2) We provide the theoretical analysis of DANI for training GANs with limited data, proving its convergence and rationality on both StyleGAN2 [28] and FastGAN [34] backbones. Furthermore, we prove that applying DANI to GANs can provide more overlapping parts between the supports of the real and fake data distributions. (3) Extensive experiments on several widely-used datasets demonstrate that the DANI can further improve the training of GANs with limited data and achieve state-of-the-art performance compared with other methods.

2 PRELIMINARIES

2.1 Generative Adversarial Networks (GANs)

Generative adversarial networks (GANs) [14] are a kind of generative model [41, 53] that consists of two players: a generator (G) and a discriminator (D). Concretely, G generates synthetic data with

some given noise while D distinguishes whether the data is from the generator’s output or real data. The loss function of GANs is shown as follows:

$$\min_G \max_D V(D, G) = \mathbb{E}_{x \sim P_R} [\log D(x)] + \mathbb{E}_{x \sim P_G} [\log(1 - D(x))]. \quad (1)$$

GANs are well-known to suffer from instability of training, leading to low quality and lack of diversity of synthesis data [68]. To stabilize the training of GANs as well as increase the quality and diversity of synthesis data, many different methods have been proposed, concerning more advanced architectures [6, 39, 40, 43, 59, 62], more stable loss functions [3, 15, 16, 37, 45], and better training strategies [10, 24, 32, 35, 36, 57, 63] to achieve better results.

2.2 Training GANs with Limited Data

Training GANs with limited data using data augmentation.

Recently, data augmentation (DA) has shown its superiority in improving performance when training GANs with limited data. Several studies [7, 26, 51, 69] apply DA to both real and fake images for D and G to prevent D from being overfitting. The widely-used approaches are Diff-Augment [69], ADA [26], and Diffusion-GAN [55]. Diff-Augment applies the differentiable DAs to both real and fake images for the D and the G , respectively. Similar to the form of Diff-Augment, ADA applies more diverse DAs and further introduces an adaptive approach that controls the strength of data augmentations. Diffusion-GAN utilizes the adaptive forward diffusion process [20] to transform both real and fake images.

Training GANs with limited data using model regularization.

In recent years, several approaches have proposed novel model regularization methods to alleviate the overfitting of D , thus improving the training of GANs with limited data. The most significant methods include R_{LC} [52] and DigGAN [12]. Specifically, R_{LC} applies a regularized objective function for the discriminator to improve the

training of GANs with limited data. DigGAN applies discriminator gap regularization to alleviate the overfitting of D .

Training GANs with limited data using a pre-trained network. Recently, employing the pre-trained network has been shown to significantly improve GANs training when using limited data. Many approaches [30, 46] apply a pre-trained network to the discriminator to extract the features from both the real and fake images to improve the training of GANs with limited data. One of the pioneering methods is Projected GAN. Specifically, Projected GAN applies a pre-trained network, i.e., EfficientNet-lite1 [49], to both the real and fake images to extract projected features in image space. Then, Projected GAN applies a multi-scale discriminator architecture which can better utilize deeper layers of the pre-trained network. As a result, Projected GAN can effectively utilize the obtained projected features to benefit the training of GANs with limited data. The loss function of the Projected GAN can be formulated as:

$$\min_G \max_{\{D_l\}} \sum_{l \in \mathcal{L}} \{ \mathbb{E}_{x \sim P_R} [\log D_l(P_l(x))] + \mathbb{E}_{x \sim P_G} [\log(1 - D_l(P_l(x)))] \}, \quad (2)$$

where $\{P_l\}$ is the set of feature projectors that map real and generated images to the discriminator's input space, $\{D_l\}$ is a set of independent discriminators operating on different feature projections and $\mathcal{L} = \{1, \dots, n\}$ is an index set for the different projectors.

2.3 Diffusion-based Generative Model

In recent years, Diffusion-based generative models [11, 20, 25] have shown their superiority in image-generation tasks. Diffusion-based generative models assume that $p_\theta(x_0) := \int p_\theta(x_{0:T}) dx_{1:T}$, where x_1, \dots, x_T are latent variables of the same dimensionality as the data $x_0 \sim p(x_0)$. There is a forward diffusion chain that gradually adds noise to the data $x_0 \sim q(x_0)$ with pre-defined variance schedule β_t and variance σ^2 in T steps:

$$\begin{aligned} q(x_{1:T}|x_0) &:= \prod_{t=1}^T q(x_t|x_{t-1}), \\ q(x_t|x_{t-1}) &:= N(x_t; \sqrt{1 - \beta_t}, \beta_t \sigma^2 I). \end{aligned} \quad (3)$$

A notable property is that x_t at an arbitrary time-step t can be sampled in closed form as:

$$q(x_t|x_0) := N(x_t; \sqrt{\bar{\alpha}_t} x_0, (1 - \bar{\alpha}_t) \sigma^2 I), \quad (4)$$

where $\alpha_t := 1 - \beta_t$, $\bar{\alpha}_t := \prod_1^t \alpha_s$. A variational lower bound [5] is then used to optimize the reverse diffusion chain as:

$$p_\theta(x_{0:T}) := N(x_T; 0, \sigma^2 I) \prod_{t=1}^T p_\theta(x_{t-1}|x_t).$$

2.4 Improving GANs Training via Noise Injection

In recent years, several studies have injected noise [2, 22, 44, 48] into the discriminator's input to improve the training of GANs. Specifically, they add random Gaussian noise to the discriminator's input in GANs to achieve better performance. The technique can

be formulated as follows:

$$c' = c + \lambda X, \quad X \sim N\{0, \sigma^2\}, \quad (5)$$

where λ is the parameter to scale the noise, c represents the original data, and c' represents the data obtained after noise injection.

3 METHODOLOGY

3.1 Dual Adaptive Noise Injection (DANI)

Despite the success of existing methods, noise injection is another plausible, complementary, yet not well-explored approach to alleviate the overfitting of D issue. To effectively utilize noise injection to improve GANs training with limited data, in this paper, we propose a novel noise injection method for training GANs with limited data, called Dual Adaptive Noise Injection (DANI). The overview of applying DANI to the GANs with limited data is shown in Figure 2. DANI consists of two adaptive strategies, i.e., adaptive injection probability and adaptive noise strength.

For the adaptive injection probability, we perform the noise injection based on a form of probability, $p \in [0, 1)$, for each real and fake sample. It is intuitive to let p be adjusted adaptively following the D 's overfitting degree without any manual tuning, regardless of data scales and attributes. To reach this goal, based on ADA [26], ANDA [65] and APA [23], we utilize an overfitting heuristic η that quantifies the D 's overfitting degree as follows:

$$\eta = \mathbb{E}(\text{sign}(D_{real})), \quad (6)$$

where $\text{sign}()$ means the sign function which obtains +1 for the non-negative input; -1, otherwise; D_{real} is the discriminator output on the real training data. Then, we follow the ANDA [65], APA [23] and ADA [26] to utilize η to adjust p . Specifically, we initialize p to zero and adjust its value once every four minibatches based on the chosen overfitting heuristic η . In this case, the noise injection probability can be adaptively controlled via the overfitting degree of D .

For the adaptive noise strength, we follow Diffusion-GAN, aiming for the strength of the injected noise to be effectively controlled by the forward diffusion process. To this end, we use the same η and d_{target} from the adaptive injection probability strategy to control the time-step t in the forward diffusion process as follows:

$$t = t + \text{sign}(\eta - d_{\text{target}}) \times C, \quad (7)$$

where C is a constant. We update t every four minibatches based on the chosen overfitting heuristic η . In this case, the strength of the noise in DANI can be controlled with an adaptive forward diffusion process.

To sum up, DANI can be formulated as:

$$\hat{x} = x + p A_t(x), \quad (8)$$

where A_t is the adaptive forward diffusion process, x represents the original data, and \hat{x} represents the data obtained after noise injection. Following Diffusion-GAN [55], we select the priority distribution for the forward diffusion process and the time step t is controlled adaptively following Eq.(7). According to [55], the forward diffusion process variances β_t in Eq.(3) are increased linearly from $\beta_1 = 10^{-4}$ to $\beta_T = 0.02$.

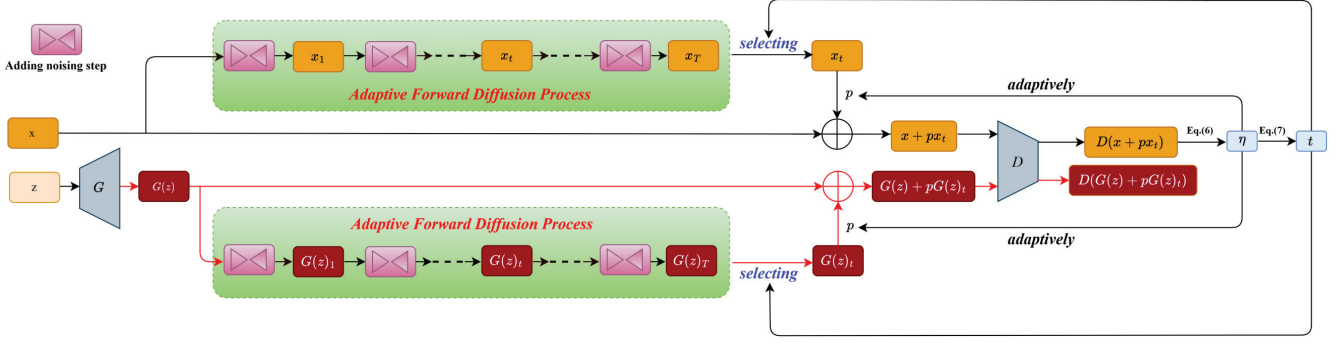


Figure 2: An overview of applying DANI to GANs with limited data. DANI consists of the adaptive injection probability strategy and the adaptive noise strength strategy. For the adaptive injection probability strategy, the Gaussian noise is adaptively injected into both the real and fake images for G and D with a probability p , where p is controlled by the overfitting degree η . For the adaptive noise strength strategy, the Gaussian noise is produced by applying an adaptive forward diffusion process to both the real and fake images for D and G , controlled by Eq.(7). In DANI, the parameters of D are optimized using noise-injected real and fake samples (all paths), and the parameters of G are optimized using noise-injected fake samples (red paths).

3.2 Theoretical Analysis

Let P_R be the distribution of real data and P_G be the distribution of generated data. For the sample x , $D(x)$ represents the estimated probability of sample x being real or fake. To assess the soundness of DANI, we follow the APA [23] and ANDA [65] to analyze DANI in a non-parametric setting. We represent the model with limitless capacity by examining its convergence in the domain of probability density functions. Ideally, the estimated probability distribution P_G should accurately model the distribution P_R without any bias if provided sufficient capability and training time.

Because the probability p is adaptively adjusted, to facilitate this theoretical analysis, we introduce the α that represents the expected strength, approximating the impact of dynamic adjustment of distribution during the overall training period. Since $p \in [0, 1)$, we have $0 \leq \alpha < p_{max} < 1$, where p_{max} is the maximum probability throughout training. Based on Eq.(1), the saturating loss function of DANI in GANs is shown as follows:

$$\min_G \max_D \mathbb{E}_{x \sim P_R} [\log D(x + \alpha A_t(x))] + \mathbb{E}_{x \sim P_G} [\log(1 - D(x + \alpha A_t(x)))] \quad (9)$$

where A_t is the adaptive forward diffusion process, where the forward diffusion process is based on Eq.(3) and the time step t is controlled adaptively following Eq.(7). Ideally, for $\forall x$, $A_t(x) \sim N\{0, \sigma^2\}$, it demonstrates that $A_t(x)$ can be directly regarded as Gaussian noise with different strengths during training. As a result, DANI in the GANs can be theoretically regarded as adding a set of Gaussian noise during training. In this case, we follow [22] to analyze the convergence of Eq. (9).

For $\forall x$, let $\varepsilon = \alpha A_t(x)$ represent the random Gaussian noise. Then, Eq.(9) can be formulated as:

$$\min_G \max_D \sum_{P_\varepsilon \in S} \{\mathbb{E}_{\varepsilon \sim P_\varepsilon} [\mathbb{E}_{x \sim P_R} [\log D(x + \varepsilon)]] + \mathbb{E}_{\varepsilon \sim P_\varepsilon} [\mathbb{E}_{x \sim P_G} [\log(1 - D(x + \varepsilon))]]\} \quad (10)$$

according to [22], we introduce a set S of probability density functions in Eq.(10), where $\varepsilon \sim P_\varepsilon \in S$. Then, based on [22, 46], the

optimal discriminator in Eq.(10) can be formulated as:

$$D^*(x) = \frac{\sum_{P_\varepsilon \in S} P_{R,\varepsilon}(x)}{\sum_{P_\varepsilon \in S} [P_{R,\varepsilon}(x) + P_{G,\varepsilon}(x)]} \quad (11)$$

Then, according to [22], the optimization of G under optimal discriminator $D^*(x)$ for Eq.(10) can be formulated as:

$$\min_G \text{JSD}\left(\frac{1}{|S|} \sum_{P_\varepsilon \in S} P_{R,\varepsilon} \parallel \frac{1}{|S|} \sum_{P_\varepsilon \in S} P_{G,\varepsilon}\right) \quad (12)$$

where **JSD** is the Jensen-Shannon divergence. Following Theorem 1 in [22], we can simplify Eq.(12) as:

$$\min_G \text{JSD}\left(\frac{1}{2}(P_R + P_R * P_\varepsilon) \parallel \frac{1}{2}(P_G + P_G * P_\varepsilon)\right) \quad (13)$$

where P_ε is a zero-mean Gaussian function produced by DANI with a positive definite covariance Σ . Then, based on the proofs of Theorem 1 in [22], we can conclude that the optimization of Eq.(13) is equal to the optimization between the distributions P_G and P_R , which is the same as in the original GAN [14], indicating that the proposed DANI does not influence the convergence.

Next, we theoretically analyze the widely-used GANs with limited data backbones, i.e., StyleGAN2 with non-saturating loss and FastGAN with hinge loss, respectively.

3.2.1 Discussion of the non-saturating loss formulation in StyleGAN2. For the StyleGAN2, the non-saturating loss function can be formulated as:

$$V_D(D, G) = \mathbb{E}_{x \sim P_R} [\log D(x)] + \mathbb{E}_{x \sim P_G} [\log(1 - D(x))], \quad (14)$$

$$V_G(D, G) = -\mathbb{E}_{x \sim P_G} [\log(D(x))].$$

Based on the theoretical analysis of the saturating loss above, the non-saturating loss with DANI can be formulated as:

$$V_D(D, G) = \sum_{P_\varepsilon \in S} \{\mathbb{E}_{\varepsilon \sim P_\varepsilon} [\mathbb{E}_{x \sim P_R} [\log D(x + \varepsilon)]] + \mathbb{E}_{\varepsilon \sim P_\varepsilon} [\mathbb{E}_{x \sim P_G} [\log(1 - D(x + \varepsilon))]]\} \quad (15)$$

$$V_G(D, G) = - \sum_{P_\varepsilon \in S} \mathbb{E}_{\varepsilon \sim P_\varepsilon} [\mathbb{E}_{x \sim P_G} [\log(D(x + \varepsilon))]].$$

Then, according to the original GAN and Theorem 2.5 as in [2], optimizing the non-saturating loss in GANs is equal to optimizing the **KLD-2JSD** item (under optimal D^*). In this case, we follow [22] to consider images of $m \times n$ pixels and with values in a compact domain $\Omega \subset \mathbb{R}^{m \times n}$, then P_R can be represented as $L^2(\Omega)$. In this case, the optimization of G under Eq.(15) can be formulated as Theorem 1 as follows.

Theorem 1. Let us choose S such that the optimization of G in Eq.(15) can be written as

$$\begin{aligned} \min_G \text{KLD}((P_G + P_G * P_\varepsilon) || (P_R + P_R * P_\varepsilon)) \\ - \text{JSD}(\frac{1}{2}(P_R + P_R * P_\varepsilon) || \frac{1}{2}(P_G + P_G * P_\varepsilon)), \end{aligned} \quad (16)$$

where P_ε represents the zero-mean Gaussian function produced by DANI with a positive definite covariance Σ . Let us also assume that the domain of P_G is restricted to Ω and thus $P_G \in L^2(\Omega)$. Then, the global optimum of Eq.(15) is $P_G(x) = P_R(x), \forall x \in \Omega$.

Proof. See supplementary materials.

3.2.2 Discussion of the hinge loss formulation in FastGAN.

For the FastGAN, the hinge loss function can be formulated as:

$$\begin{aligned} V_D(D, G) &= \mathbb{E}_{x \sim P_R} [\min(0, -1 + D(x))] \\ &\quad + \mathbb{E}_{x \sim P_G} [\min(0, -1 - D(x))], \\ V_G(D, G) &= -\mathbb{E}_{x \sim P_G} [D(x)]. \end{aligned} \quad (17)$$

Based on the theoretical analysis of the saturating loss above, the hinge loss with DANI can be formulated as:

$$\begin{aligned} V_D(D, G) &= \sum_{P_\varepsilon \in S} \{ \mathbb{E}_{\varepsilon \sim P_\varepsilon} [\mathbb{E}_{x \sim P_R} [\min(0, -1 + D(x + \varepsilon))] \\ &\quad + \mathbb{E}_{\varepsilon \sim P_\varepsilon} [\mathbb{E}_{x \sim P_G} [\min(0, -1 - D(x + \varepsilon))]] \}, \\ V_G(D, G) &= - \sum_{P_\varepsilon \in S} \mathbb{E}_{\varepsilon \sim P_\varepsilon} [\mathbb{E}_{x \sim P_G} [D(x + \varepsilon)]]. \end{aligned} \quad (18)$$

According to [33, 39, 50], optimizing the hinge loss is equivalent to minimizing the so-called reverse **KL** divergence item (under optimal D^*). Therefore, following the definition in §3.2.1, the optimization of G under Eq.(18) can be formulated as Theorem 2 as follows.

Theorem 2. Let us choose S such that the optimization of G in Eq.(18) can be written as

$$\min_G \text{KLD}((P_G + P_G * P_\varepsilon) || (P_R + P_R * P_\varepsilon)), \quad (19)$$

where P_ε represents the zero-mean Gaussian function produced by DANI with a positive definite covariance Σ . Let us also assume that the domain of P_G is restricted to Ω and thus $P_G \in L^2(\Omega)$. Then, the global optimum of Eq.(18) is $P_G(x) = P_R(x), \forall x \in \Omega$.

Proof. See supplementary materials.

3.2.3 Discussion of Regularization in StyleGAN2 and FastGAN.

Both StyleGAN2 and FastGAN apply regularization to D in their loss function to enhance the training of GANs. To demonstrate the rigour and reasonableness of our theory above, we point out that regularization in both StyleGAN2 and FastGAN aims to avoid D becoming overly confident. Therefore, regularization does not influence the soundness of our theoretical insights under optimal

D^* . Additionally, based on the theory in [38], applying regularization in GANs can still be convergent when initialized sufficiently close to the equilibrium point, which demonstrates that our theory analysis is reasonable.

Next, we prove the proposed DANI can increase the overlapping parts between the supports of P_G and P_R , as shown in Theorem 3. **Theorem 3.** For two supports of the distributions P and Q consisting of overlapping parts, if there exists one sample $x \in P \cap Q, \forall$ function $A_t, [x + pA_t(x)] \in [P + pA_t(P)] \cap [Q + pA_t(Q)]$.

Proof. $[x \in P \cap Q] \Rightarrow [x \in P \text{ and } x \in Q] \Rightarrow [pA_t(x) \in pA_t(P) \text{ and } pA_t(x) \in pA_t(Q)] \Rightarrow [x + pA_t(x)] \in [P + pA_t(P)] \cap [Q + pA_t(Q)]$.

The P and Q in Theorem 3 can be replaced as P_G and P_R for the GANs, and the function A_t is the same as the adaptive forward diffusion function A_t in DANI. Theorem 3 shows that with the function A_t , if the sample x is in the overlapping parts between the supports of P_G and P_R , $x + pA_t(x)$ can still be in the overlapping parts between the supports of $P_G + pA_t(P_G)$ and $P_R + pA_t(P_R)$. Because the probability p and the function A_t in DANI are both controlled by the overfitting degree of D adaptively, this means that p and A_t can vary adaptively during training. In this case, one sample x can produce a set of samples $\{x + pA_t(x)\}$ during training. This demonstrates that the overlapping parts between the DANI distribution $P_G + pA_t(P_G)$ and $P_R + pA_t(P_R)$ consist of more samples, thus providing more overlapping parts, leading to better performance.

3.3 Discussion of the Difference between DANI and Diffusion-GAN

Although the adaptive forward diffusion process has been already applied to the Diffusion-GAN, the two main differences between DANI and Diffusion-GAN are shown as follows. First, same to the data augmentation methods in GANs with limited data [26, 51, 55, 69], the noise injection formulation in Diffusion-GAN transforms both real and fake samples by an adaptive forward diffusion process. This design can cause the original real and fake data not to be visible to D during training, which decreases the training of GANs under limited data settings, leading to sub-optimal performance. In contrast, the noise injection form of the proposed DANI allows the original real and fake data to be visible to D during training (under adaptive injection probability $p = 0$), which can improve the training of GANs under limited data settings, resulting in better performance. Second, according to [65], the leaking problem still exists in Diffusion-GAN. Compared with the Diffusion-GAN, which only employs the adaptive noise strength to alleviate the leaking problem, the proposed DANI has an additional adaptive injection probability to further alleviate the leaking problem, therefore achieving better performance.

4 EXPERIMENT

4.1 Datasets and Implementation Details

We select FFHQ [28], LSUN-CAT [47] and low-shot datasets for experiments. For fair comparisons, we follow the official open-source codes¹ for preprocessing and resizing the FFHQ and LSUN-CAT dataset to 256×256 , as was the case in recent studies [26, 32, 69].

¹<https://github.com/NVlabs/stylegan2-ada-pytorch>

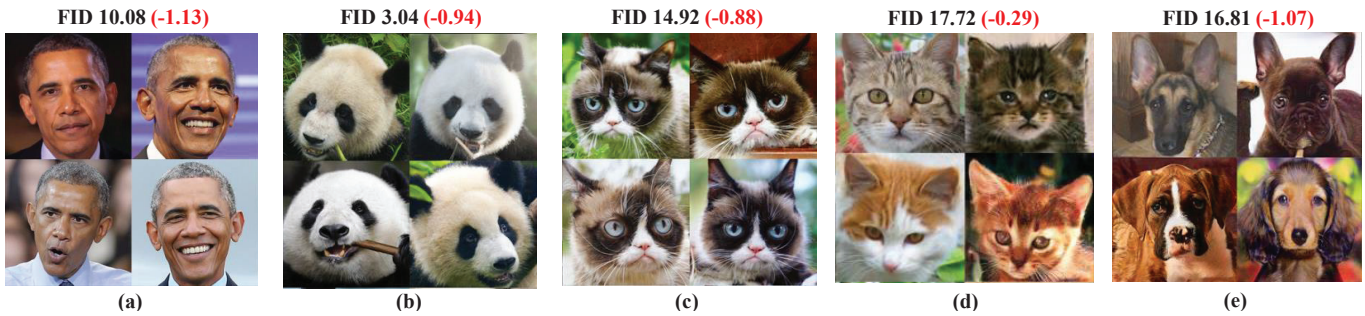


Figure 3: Images generated by Projected GAN + DANI on (a) 100-shot Obama dataset, (b) 100-shot Panda dataset, (c) 100-shot Grumpy Cat dataset, (d) Animal-Face Cat dataset and (e) Animal-Face Dog datasets. The decreasing value of FID in red color demonstrates the improvement of Projected GAN + DANI compared with baseline Projected GAN. *Best viewed in color.*

Method	MA	Backbone	100-shot			Animal-Face	
			Obama	Grumpy Cat	Panda	Cat	Dog
StyleGAN2 [28]	Yes	StyleGAN2	65.57	39.92	22.08	51.66	77.96
Diff-Augment [69]	Yes	StyleGAN2	46.87	27.08	12.06	42.44	58.85
ADA [26]	Yes	StyleGAN2	45.69	26.62	12.90	40.77	56.83
Diffusion-GAN [55]	Yes	StyleGAN2	28.55	21.87	8.69	33.18	68.15
AugSelf-StyleGAN2 [21]	Yes	StyleGAN2	26.00	19.81	8.36	30.53	48.19
FakeCLR [32]	Yes	StyleGAN2	26.95	19.56	8.42	26.34	42.02
InsGen [58]	Yes	StyleGAN2	32.42	22.01	9.85	33.01	44.93
InsGen + DANI	Yes	StyleGAN2	23.25	18.83	6.99	24.14	34.19
FastGAN [34]	Yes	FastGAN	35.80	25.75	9.70	33.85	52.46
FreGAN [59]	Yes	FastGAN	33.39	24.93	8.97	31.05	47.85
Projected GAN [46]	Yes	FastGAN	11.21	15.80	3.98	18.01	17.88
Projected GAN + DANI	Yes	FastGAN	10.08	14.92	3.04	17.72	16.81

Table 1: FID scores of different methods on low-shot datasets (256×256). MA means Massive Augmentation, i.e., xflipping, which consists of the same meaning in [9]. The results of the Projected GAN are obtained via running the official open-source codes <https://github.com/autonomousvision/projected-gan>.

Method	MA	Backbone	FFHQ			
			100	1K	2K	5K
StyleGAN2 [28]	No	StyleGAN2	179	100.16	54.3	49.68
ADA [26]	Yes	StyleGAN2	85.8	21.29	15.39	10.96
Diff-Augment [69]	Yes	StyleGAN2	61.91	25.66	24.32	10.45
APA [23]	Yes	StyleGAN2	65	18.89	16.90	8.38
AugSelf-StyleGAN2+ [21]	Yes	StyleGAN2	-	20.39	-	9.15
FakeCLR [32]	Yes	StyleGAN2	42.56	15.92	9.90	7.25
InsGen [58]	Yes	StyleGAN2	45.75	18.21	11.47	7.83
InsGen + DANI	Yes	StyleGAN2	41.79	15.63	9.78	7.21
Projected GAN [46]	Yes	FastGAN	26.25	11.12	8.25	6.85
Projected GAN + DANI	Yes	FastGAN	23.98	10.81	7.73	6.20

Table 2: FID scores of different methods on the 256×256 FFHQ dataset. MA means Massive Augmentation, i.e., xflipping, which consists of the same meaning in [9]. The results of the Projected GAN are obtained by running the official codes <https://github.com/autonomousvision/projected-gan>.

Method	MA	Backbone	LSUN-CAT			
			1K	5K	10K	30K
Projected GAN	Yes	FastGAN	19.39	13.57	8.92	8.65
Projected GAN + DANI	Yes	FastGAN	16.82	11.27	8.53	8.21

Table 3: FID scores of different methods on the 256×256 LSUN-CAT dataset. MA is Massive Augmentation, i.e., xflipping, which consists of the same meaning in [9]. The results of the Projected GAN are obtained by running the official open-source codes.

The FFHQ dataset contains 70K high-resolution images of human faces. Following FakeCLR [32], we select a subset of 100, 1K, 2K, and 5K for a fair comparison. The LSUN-CAT dataset contains 200K high-resolution images of cats. Based on Diff-Augment [69], we select a subset of 1K, 5K, 10K and 30K for the comparison. The Low-shot datasets contain five datasets (Obama, Grumpy Cat, Panda, Animal-Face Cat, and Animal-Face Dog) with 100, 100, 100, 160, and 389 training images, respectively. We select the state-of-the-art StyleGAN2 and FastGAN methods, e.g., InsGen and Projected GAN [46], as our backbone and set the batch size as 64 for all experiments. More importantly, according to Eq.(2), the DANI in Projected GAN is applied to the real and fake projected features rather than real and fake images. The commonly used Fréchet Inception Distance (FID) [19] is applied as the evaluation metric; the full dataset is used as the reference distribution for FID calculation, following prior work [26, 32, 69]. For a fair comparison, according to [32, 69], the FIDs are averaged over five runs in all of the experiments; all standard deviations are less than 1%. For the adaptive forward diffusion process A_t in DANI, based on Diffusion-GAN [55], the initial value of t is set as 5. Then, we set $t_{min} = 5$ and the $t_{max} = 1000$ for InsGen, and set the $t_{min} = 5$ and the $t_{max} = 500$ for Projected GAN. The forward diffusion process variances are set to constants increasing linearly from $\beta_1 = 10^{-4}$ to $\beta_T = 0.02$. More details of experiments, i.e., experimental results with the other evaluation metric Inception Score (IS) [45] and the link of the pre-trained model with test code, can be found in supplementary materials.

4.2 Results on Low-shot Datasets

The results on low-shot datasets with StyleGAN2 and FastGAN are shown in Table 1. Applying DANI to both InsGen and Projected GAN can achieve better performance. Projected GAN + DANI achieves the lowest FID compared with all of the other methods. More importantly, Projected GAN applied DA, regularizations and pre-trained models to achieve state-of-the-art performance on the low-shot datasets; adding DANI can further reduce the FID score by about 5% to 10%. The images generated by Projected GAN + DANI on low-shot datasets are shown in Figure 3. To further demonstrate the superiority of DANI, the comparison results of Projected GAN + DANI and Projected GAN on low-shot datasets using the CLIP FID (FID_{CLIP}) [31] are shown in Table 4.

4.3 Results on FFHQ and LSUN-CAT Datasets

The results on the FFHQ datasets are shown in Table 2. For the FFHQ dataset, following the FakeCLR [32], we perform experiments on the subset of 100, 1K, 2K and 5K. Applying DANI to both InsGen and Projected GAN can achieve better performance and Projected GAN + DANI achieves state-of-the-art performance compared with

Method	100-shot			AFHQ	
	Obama	Grumpy Cat	Panda	Cat	Dog
Projected GAN [45]	2.07	4.92	2.68	8.54	7.34
Projected GAN + DANI	2.00	4.75	2.56	8.31	7.16

Table 4: Compared FID_{CLIP} scores of Projected GAN and Projected GAN + DANI on low-shot datasets. We use the same model as for FID calculation to calculate the FID_{CLIP}.

Method	Seconds per 1K images
Projected GAN	12.11
Projected GAN + DANI	12.20

Table 5: The training time on the Animal-Face Dog dataset (256×256) with or without DANI. The results are calculated by averaging over ten times on the four NVIDIA RTX TITAN GPUs with batch size 64. All standard deviations are less than 1% relatively.

other methods. The results on the LSUN-CAT datasets with the state-of-the-art method, i.e., Projected GAN, are shown in Table 3. For the LSUN-CAT dataset, based on Diff-Augment [69], we conduct experiments on the subset of 1K, 5K, 10K and 30K. Applying DANI to Projected GAN also achieves better performance.

4.4 Computational Cost

The results of the training time on the Animal-Face Dog dataset (256×256) with or without DANI using Projected GAN have been demonstrated in Table 5. The increased computational cost with DANI is negligible ($< 1\%$).

4.5 Ablation Study

Impact of two adaptive strategies in DANI. To demonstrate that two adaptive strategies in DANI are reasonable, we conduct an ablation study on the impact of adaptive strategies in DANI, and the results are shown in Table 7. It is clear that directly adding the Gaussian noise to the Projected GAN, i.e., Projected GAN + DANI (without both adaptive strategies), can cause worse performance compared with the baseline. Adding each adaptive strategy in DANI to the Projected GAN increases the performance, which demonstrates that the two adaptive strategies in DANI are suitable. Furthermore, to further demonstrate that DANI can alleviate the leaking problem, following [65], we also show the compared generated images of Projected GAN + DANI (without both adaptive strategies) and Projected GAN + DANI on the 100-shot Obama

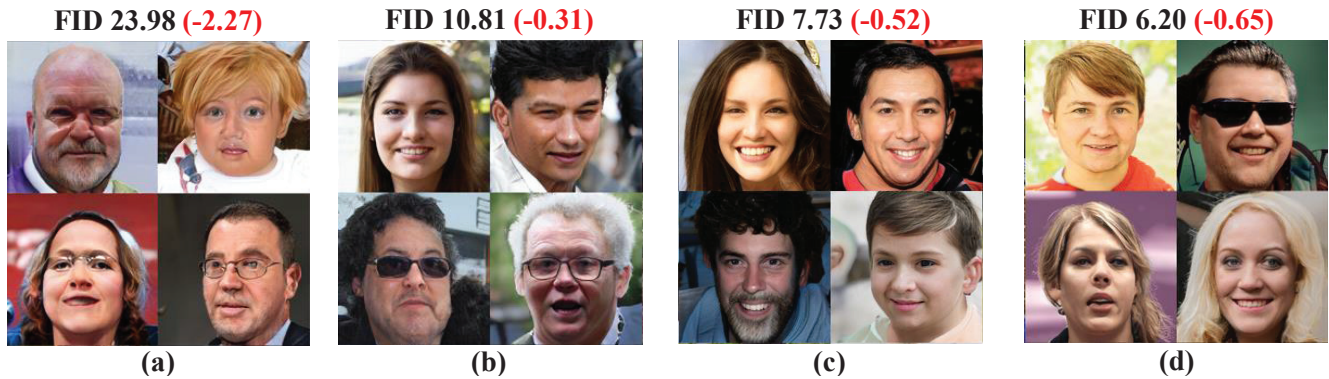


Figure 4: Images generated by Projected GAN + DANI on (a) FFHQ-100 dataset, (b) FFHQ-1K dataset, (c) FFHQ-2K dataset and (d) FFHQ-5K dataset. The decreasing value of FID in red color demonstrates the improvement of Projected GAN + DANI compared with baseline Projected GAN. *Best viewed in color.*

Method	MA	100-shot			Animal-Face	
		Obama	Grumpy Cat	Panda	Cat	Dog
Diffusion-Projected GAN [55]	Yes	10.54	15.13	3.39	17.86	17.22
Projected GAN + DANI	Yes	10.08	14.92	3.04	17.72	16.81

Table 6: Compared FID scores of Diffusion-Projected GAN and Projected GAN + DANI on 256×256 low-shot datasets. MA is Massive Augmentation, i.e., xflipping, which consists of the same meaning as in [9]. The results of the Diffusion-Projected GAN are obtained by ourselves by running the official open-source codes.

dataset, as shown in Figure 5. It is clear that directly adding the Gaussian noise to the Projected GAN, i.e., Projected GAN + DANI (without both adaptive strategies), still has slightly noisy results. In contrast, applying DANI to Projected GANs, i.e., Projected GAN + DANI, can avoid the leaking issue during training.



Figure 5: Compared generated images on the 100-shot Obama dataset: (a) Images generated by Projected GAN + DANI (without both adaptive strategies) and (b) Images generated by Projected GAN + DANI. *Best viewed in color.*

DANI v.s. Transforming both real and fake data by an adaptive forward diffusion. Recently, Diffusion-GAN [55] transforms both real and fake samples by an adaptive forward diffusion to improve GANs training. To further show the superiority of DANI compared with Diffusion-GAN, we also conduct an ablation study

Method	FID
Projected GAN (baseline)	11.21
Projected GAN + DANI (<i>w/o</i> both strategies)	11.62
Projected GAN + DANI (<i>w/o</i> adaptive noise strength)	10.81
Projected GAN + DANI (<i>w/o</i> adaptive injection probability)	10.33
Projected GAN + DANI	10.08

Table 7: FID scores (lower is better) of different methods on the 100-shot-Obama dataset (256×256). Massive Augmentation [9] is applied to all of the methods.

comparing the proposed DANI with Diffusion-GAN using the Projected GAN backbone, and the results are shown in Table 6. Projected GAN + DANI can achieve better performance compared with Diffusion-Projected GAN on low-shot datasets.

5 CONCLUSION

In this paper, to improve GANs training with limited data, we propose a novel noise injection method called Dual Adaptive Noise Injection (DANI), with a negligible computational cost increase. Specifically, DANI consists of two adaptive strategies, i.e., the adaptive injection probability and adaptive noise strength. Extensive experiments on commonly-used datasets demonstrate that DANI can effectively improve the training of GANs with limited data and achieve state-of-the-art results compared with other methods.

6 ACKNOWLEDGEMENT

This work is partially supported by the High Performance Computing center of Queen’s University Belfast and the Kelvin-2 supercomputer (EPSRC grant EP/T022175/1). First author is supported by a scholarship of the Queen’s University Belfast and the Department for the Economy, Northern Ireland.

REFERENCES

- [1] Guozhong An. 1996. The effects of adding noise during backpropagation training on a generalization performance. *Neural computation* 8, 3 (1996), 643–674.
- [2] Martin Arjovsky and Léon Bottou. 2017. Towards principled methods for training generative adversarial networks. In *ICLR*.
- [3] Martin Arjovsky, Soumith Chintala, and Léon Bottou. 2017. Wasserstein generative adversarial networks. In *ICML*.
- [4] Chris M Bishop. 1995. Training with noise is equivalent to Tikhonov regularization. *Neural computation* 7, 1 (1995), 108–116.
- [5] David M Blei, Alp Kucukelbir, and Jon D McAuliffe. 2017. Variational inference: A review for statisticians. *Journal of the American statistical Association* 112, 518 (2017), 859–877.
- [6] Andrew Brock, Jeff Donahue, and Karen Simonyan. 2019. Large scale GAN training for high fidelity natural image synthesis. In *ICLR*.
- [7] Tianlong Chen, Yu Cheng, Zhe Gan, Jingjing Liu, and Zhangyang Wang. 2021. Data-Efficient GAN Training Beyond (Just) Augmentations: A Lottery Ticket Perspective. In *NeurIPS*.
- [8] Yang Chen, Yingwei Pan, Ting Yao, Xinmei Tian, and Tao Mei. 2019. MocycleGAN: Unpaired video-to-video translation. In *ACM MM*.
- [9] Kaiwen Cui, Jiaying Huang, Zhipeng Luo, Gongjie Zhang, Fangneng Zhan, and Shijian Lu. 2022. GenCo: Generative Co-training for Generative Adversarial Networks with Limited Data. In *AAAI*.
- [10] Emily L Denton, Soumith Chintala, Rob Fergus, et al. 2015. Deep generative image models using a laplacian pyramid of adversarial networks. In *NeurIPS*.
- [11] Prafulla Dhariwal and Alexander Nichol. 2021. Diffusion models beat GANs on image synthesis. In *NeurIPS*.
- [12] Tiantian Fang, Ruoyu Sun, and Alex Schwing. 2022. DigGAN: Discriminator gradient Gap Regularization for GAN Training with Limited Data. In *NeurIPS*.
- [13] Ruili Feng, Deli Zhao, and Zheng-Jun Zha. 2021. Understanding noise injection in GANs. In *ICML*.
- [14] Ian Goodfellow, Jean Pouget-Abadie, Mehdi Mirza, Bing Xu, David Warde-Farley, Sherjil Ozair, Aaron Courville, and Yoshua Bengio. 2014. Generative adversarial nets. In *NeurIPS*.
- [15] Ishaan Gulrajani, Faruk Ahmed, Martin Arjovsky, Vincent Dumoulin, and Aaron C Courville. 2017. Improved training of wasserstein GANs. In *NeurIPS*.
- [16] Tianyu Guo, Chang Xu, Jiajun Huang, Yunhe Wang, Boxin Shi, Chao Xu, and Dacheng Tao. 2020. On positive-unlabeled classification in GAN. In *CVPR*.
- [17] Sonam Gupta, Arti Keshari, and Sukhendu Das. 2022. Rv-GAN: Recurrent GAN for unconditional video generation. In *CVPR*.
- [18] Xufeng He, Yang Hua, Tao Song, Zongpu Zhang, Zhengui Xue, Ruhui Ma, Neil Robertson, and Haibing Guan. 2019. Unsupervised video summarization with attentive conditional generative adversarial networks. In *ACM MM*.
- [19] Martin Heusel, Hubert Ramsauer, Thomas Unterthiner, Bernhard Nessler, and Sepp Hochreiter. 2017. GANs trained by a two time-scale update rule converge to a local nash equilibrium. In *NeurIPS*.
- [20] Jonathan Ho, Ajay Jain, and Pieter Abbeel. 2020. Denoising diffusion probabilistic models. In *NeurIPS*.
- [21] Liang Hou, Qi Cao, Yige Yuan, Songtao Zhao, Chongyang Ma, Siyuan Pan, Pengfei Wan, Zhongyuan Wang, Huawei Shen, and Xueqi Cheng. 2023. Augmentation-Aware Self-Supervision for Data-Efficient GAN Training. In *NeurIPS*.
- [22] Simon Jenni and Paolo Favaro. 2019. On stabilizing generative adversarial training with noise. In *CVPR*.
- [23] Liming Jiang, Bo Dai, Wayne Wu, and Chen Change Loy. 2021. Deceive D: Adaptive Pseudo Augmentation for GAN Training with Limited Data. In *NeurIPS*.
- [24] Tero Karras, Timo Aila, Samuli Laine, and Jaakko Lehtinen. 2018. Progressive growing of GANs for improved quality, stability, and variation. In *ICLR*.
- [25] Tero Karras, Miika Aittala, Timo Aila, and Samuli Laine. 2022. Elucidating the design space of diffusion-based generative models. In *NeurIPS*.
- [26] Tero Karras, Miika Aittala, Janne Hellsten, Samuli Laine, Jaakko Lehtinen, and Timo Aila. 2020. Training generative adversarial networks with limited data. In *NeurIPS*.
- [27] Tero Karras, Samuli Laine, and Timo Aila. 2019. A style-based generator architecture for generative adversarial networks. In *CVPR*.
- [28] Tero Karras, Samuli Laine, Miika Aittala, Janne Hellsten, Jaakko Lehtinen, and Timo Aila. 2020. Analyzing and improving the image quality of styleGAN. In *CVPR*.
- [29] Ji-Hoon Kim, Sang-Hoon Lee, Ji-Hyun Lee, and Seong-Whan Lee. 2021. Fre-GAN: Adversarial frequency-consistent audio synthesis. *arXiv preprint arXiv:2106.02297* (2021).
- [30] Nupur Kumari, Richard Zhang, Eli Shechtman, and Jun-Yan Zhu. 2022. Ensembling off-the-shelf models for GAN training. In *CVPR*.
- [31] Tuomas Kynkäänniemi, Tero Karras, Miika Aittala, Timo Aila, and Jaakko Lehtinen. 2023. The role of imagenet classes in fr\`echet inception distance. In *ICLR*.
- [32] Ziqiang Li, Chaoyue Wang, Heliang Zheng, Jing Zhang, and Bin Li. 2022. FakeCLR: Exploring Contrastive Learning for Solving Latent Discontinuity in Data-Efficient GANs. In *ECCV*.
- [33] Jae Hyun Lim and Jong Chul Ye. 2017. Geometric GAN. *arXiv preprint arXiv:1705.02894* (2017).
- [34] Bingchen Liu, Yizhe Zhu, Kunpeng Song, and Ahmed Elgammal. 2021. Towards faster and stabilized GAN training for high-fidelity few-shot image synthesis. In *ICLR*.
- [35] Haozhe Liu, Wentian Zhang, Bing Li, Haoqian Wu, Nanjun He, Yawen Huang, Yuexiang Li, Bernard Ghanem, and Yefeng Zheng. 2023. Adaptivemix: Improving GAN training via feature space shrinkage. In *CVPR*.
- [36] Steven Liu, Tongzhou Wang, David Bau, Jun-Yan Zhu, and Antonio Torralba. 2020. Diverse image generation via self-conditioned GANs. In *CVPR*.
- [37] Xudong Mao, Qing Li, Haoran Xie, Raymond YK Lau, Zhen Wang, and Stephen Paul Smolley. 2017. Least squares generative adversarial networks. In *ICCV*.
- [38] Lars Mescheder, Andreas Geiger, and Sebastian Nowozin. 2018. Which training methods for GANs do actually converge?. In *ICML*.
- [39] Takeru Miyato, Toshiki Kataoka, Masanori Koyama, and Yuichi Yoshida. 2018. Spectral normalization for generative adversarial networks. In *ICLR*.
- [40] Takeru Miyato and Masanori Koyama. 2018. cGANs with projection discriminator. In *ICLR*.
- [41] Aaron van den Oord, Nal Kalchbrenner, and Koray Kavukcuoglu. 2016. Pixel recurrent neural networks. In *ICML*.
- [42] Yingwei Pan, Zhaofan Qiu, Ting Yao, Houqiang Li, and Tao Mei. 2017. To create what you tell: Generating videos from captions. In *ACM MM*.
- [43] Alec Radford, Luke Metz, and Soumith Chintala. 2016. Unsupervised representation learning with deep convolutional generative adversarial networks. In *ICLR*.
- [44] Kevin Roth, Aurelien Lucchi, Sebastian Nowozin, and Thomas Hofmann. 2017. Stabilizing training of generative adversarial networks through regularization. In *NeurIPS*.
- [45] Tim Salimans, Ian Goodfellow, Wojciech Zaremba, Vicki Cheung, Alec Radford, and Xi Chen. 2016. Improved techniques for training GANs. In *NeurIPS*.
- [46] Axel Sauer, Kashyap Chitta, Jens Müller, and Andreas Geiger. 2021. Projected GANs converge faster. In *NeurIPS*.
- [47] Zhangzhang Si and Song-Chun Zhu. 2011. Learning hybrid image templates (HIT) by information projection. *IEEE Transactions on pattern analysis and machine intelligence* 34, 7 (2011), 1354–1367.
- [48] Casper Kaae Sønderby, Jose Caballero, Lucas Theis, Wenzhe Shi, and Ferenc Huszár. 2017. Amortised map inference for image super-resolution. In *ICLR*.
- [49] Mingxing Tan and Quoc Le. 2019. Efficientnet: Rethinking model scaling for convolutional neural networks. In *ICML*.
- [50] Dustin Tran, Rajesh Ranganath, and David M Blei. 2017. Deep and hierarchical implicit models. *arXiv preprint arXiv:1702.08896* 7, 3 (2017), 13.
- [51] Ngoc-Trung Tran, Viet-Hung Tran, Ngoc-Bao Nguyen, Trung-Kien Nguyen, and Ngai-Man Cheung. 2021. On data augmentation for GAN training. *IEEE Transactions on Image Processing* 30 (2021), 1882–1897.
- [52] Hung-Yu Tseng, Lu Jiang, Ce Liu, Ming-Hsuan Yang, and Weilong Yang. 2021. Regularizing generative adversarial networks under limited data. In *CVPR*.
- [53] Aaron van den Oord, Nal Kalchbrenner, Lasse Espeholt, Oriol Vinyals, Alex Graves, et al. 2016. Conditional image generation with pixelcnn decoders. In *NeurIPS*.
- [54] Hao Wang, Guosheng Lin, Steven CH Hoi, and Chunyan Miao. 2021. Cycle-consistent inverse GAN for text-to-image synthesis. In *ACM MM*.
- [55] Zhendong Wang, Huangjie Zheng, Pengcheng He, Weizhu Chen, and Mingyuan Zhou. 2023. Diffusion-GAN: Training GANs with Diffusion. In *ICLR*.
- [56] Haozhe Wu, Jia Jia, Haoyu Wang, Yishun Dou, Chao Duan, and Qingshan Deng. 2021. Imitating arbitrary talking style for realistic audio-driven talking face synthesis. In *ACM MM*.
- [57] Ceyuan Yang, Yujun Shen, Yinghao Xu, Deli Zhao, Bo Dai, and Bolei Zhou. 2022. Improving GANs with a dynamic discriminator. In *NeurIPS*.
- [58] Ceyuan Yang, Yujun Shen, Yinghao Xu, and Bolei Zhou. 2021. Data-efficient instance generation from instance discrimination. In *NeurIPS*.
- [59] Mengping Yang, Zhe Wang, Ziqiu Chi, and Yanbing Zhang. 2022. FreGAN: Exploiting Frequency Components for Training GANs under Limited Data. In *NeurIPS*.
- [60] Mengping Yang, Zhe Wang, Wenyi Feng, Qian Zhang, and Ting Xiao. 2023. Improving Few-shot Image Generation by Structural Discrimination and Textual Modulation. In *ACM MM*.
- [61] Dan Zeng, Han Liu, Hui Lin, and Shiming Ge. 2020. Talking face generation with expression-tailored generative adversarial network. In *ACM MM*.

- [62] Han Zhang, Ian Goodfellow, Dimitris Metaxas, and Augustus Odena. 2019. Self-attention generative adversarial networks. In *ICML*.
- [63] Han Zhang, Tao Xu, Hongsheng Li, Shaoting Zhang, Xiaogang Wang, Xiao lei Huang, and Dimitris N Metaxas. 2017. StackGAN: Text to photo-realistic image synthesis with stacked generative adversarial networks. In *ICCV*.
- [64] Han Zhang, Zizhao Zhang, Augustus Odena, and Honglak Lee. 2020. Consistency regularization for generative adversarial networks. In *ICLR*.
- [65] Zhaoyu Zhang, Yang Hua, Guanxiong Sun, Hui Wang, and Seán McLoone. 2024. Improving the Leaking of Augmentations in Data-Efficient GANs via Adaptive Negative Data Augmentation. In *WACV*.
- [66] Zhaoyu Zhang, Yang Hua, Hui Wang, and Seán McLoone. 2024. Improving the fairness of the min-max game in GANs training. In *WACV*.
- [67] Zhaoyu Zhang, Mengyan Li, Haonian Xie, Jun Yu, Tongliang Liu, and Chang Wen Chen. 2021. TWGAN: Twin Discriminator Generative Adversarial Networks. *IEEE Transactions on Multimedia* (2021).
- [68] Zhaoyu Zhang, Mengyan Li, and Jun Yu. 2018. On the convergence and mode collapse of GAN. In *SIGGRAPH Asia 2018 Technical Briefs*.
- [69] Shengyu Zhao, Zhijian Liu, Ji Lin, Jun-Yan Zhu, and Song Han. 2020. Differentiable augmentation for data-efficient GAN training. In *NeurIPS*.
- [70] Zhengli Zhao, Sameer Singh, Honglak Lee, Zizhao Zhang, Augustus Odena, and Han Zhang. 2021. Improved consistency regularization for GANs. In *AAAI*.